


Panasonic[®]

Operating Instructions

DECT 6.0 Portable Station

Model No. **KX-TD7696**

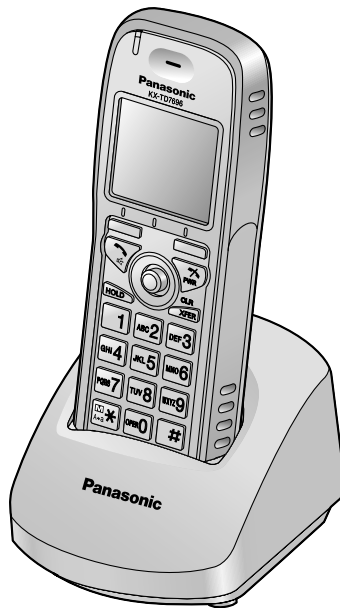

Thank you for purchasing a Panasonic DECT 6.0 Portable Station.

Please read this manual carefully before using this product and save this manual for future use.

Please use only the battery provided and charge the battery for at least 5.5 hours before using the handset for the first time.

See page 75 for System Requirements.

This product meets IP54 classification (handset only).

Table of Contents

Before Initial Use4

Accessories (included)4

Installation5

 Battery Installation5

 Charger Connection5

 Charging the Battery6

 Charger Wall Mounting6

 Attaching the Belt Clip7

Before Operating the Handset8

Location of Controls8

 Key Lock9

 Meeting Mode10

 Residential Mode and Office Mode10

Selecting the Display Language11

Editing the Standby Display Name11

Editing the Names of the Flexible CO Keys12

Adjusting the Ringer Volume13

Adjusting the Ringer Volume or Turning the Ringer off while Ringing13

Changing the Vibrate Setting14

Adjusting the Receiver/Speaker/Headset Volume14

Changing the Usage Mode (Residential Mode/Office Mode)15

Display16

Soft Keys17

Operation Outline for Residential Mode19

Operation Outline for Office Mode20

Function Menus21

Function Keys22

Flexible CO Keys23

Operation24

Making Calls24

 Searching for an Item Stored in the Phonebook28

Receiving Calls31

 Caller ID32

During a Conversation33

Useful Features35

Making Use of the Voice Mail Service39

Using the Handset Phonebook41

Handset Phonebook41

 Private Ring41

Storing an Item in the Handset Phonebook41

 Storing a New Item41

 Editing a Stored Item42

 Storing an Item Using the Predialing43







 Storing an Item Using the Outgoing Call Log43

Storing an Item Using the Incoming Call Log	44
Storing an Item Using the PBX System Phonebook	45
Storing an Item Using the PBX Extension Phonebook	46
Editing Category Names	46
Assigning Hot Keys	47
Entering Characters	48
Character Mode Table	49
Locking the Handset Phonebook	50
Locking the Handset Phonebook	50
Unlocking the Handset Phonebook	50
Unlocking the Handset Phonebook Temporarily	51
Deleting Stored Items	52
Deleting Stored Items in Handset Phonebook/Hot Key Dial/Outgoing Call Log/Incoming Call Log	52
Handset Phonebook	52
Hot Key Dial	52
Outgoing Call Log	53
Incoming Call Log	53
Configuring Handset Settings	54
Changing the Initial Settings	54
Handset Setting Menu Layout	55
Memo Alarm Setting	62
Troubleshooting and Error Messages	64
Troubleshooting	64
Error Messages	66
Important Information	67
Battery Information	67
Important Safety Instructions	68
For Your Safety	68
For Best Performance	70
FCC and Other Information	72
Customer Information	73

Before Initial Use

Please read “Important Information” on page 67 before using. Read and understand all instructions.

Accessories (included)


AC adaptor One  [Part No.] PQLV203	Charger One  [Part No.] PSWETD7696M	Battery One  [Part No.] N4HHGMB00005 or HHR-P103
Belt Clip One  [Part No.] PSKE1098Z1	Battery Cover One  [Part No.] PSKK1056Z1	Screws and Washers Two  [Part No.] Screws: PQHE5004Y Washers: XWG35FJ

- To order accessories, call toll free **1-800-332-5368**.

Installation


Battery Installation

Insert the battery as shown. Close the cover as indicated by the arrow. Close the latch to secure the cover in place.

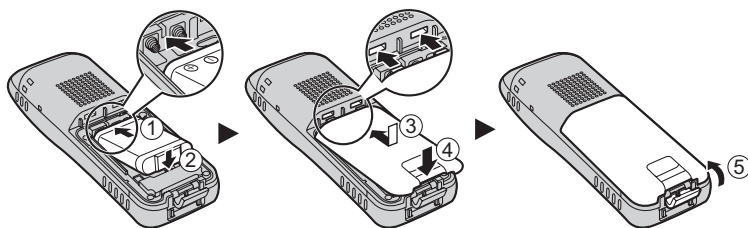

Charger Connection

Connect the AC adaptor to the charger.

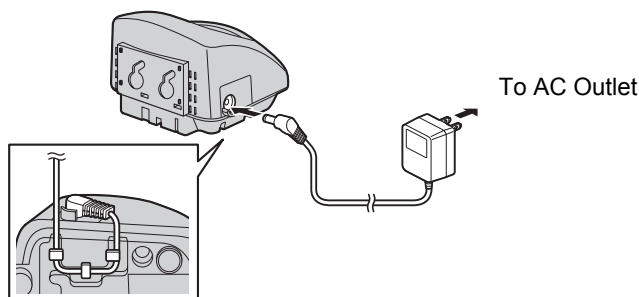

- The AC adaptor should be connected to a vertically oriented or floor-mounted AC outlet. Do not connect the AC adaptor to a ceiling-mounted AC outlet, as the weight of the adaptor may cause it to become disconnected.
- Fasten the AC adaptor cord to the cord holder.
- Use only the Panasonic AC adaptor PQLV203.


WARNING

- To reduce the risk of fire or electric shock, do not overload AC outlets and extension cords.
- Do not bundle the charger's AC adaptor cord with the power cords of machines located nearby.
- Completely insert the AC adaptor/power plug into the AC outlet. Failure to do so may cause electric shock and/or excessive heat resulting in a fire.

Before Initial Use


Charging the Battery

At the time of shipment, the battery is not charged. **Please charge the battery for at least 5.5 hours before using the handset for the first time.**

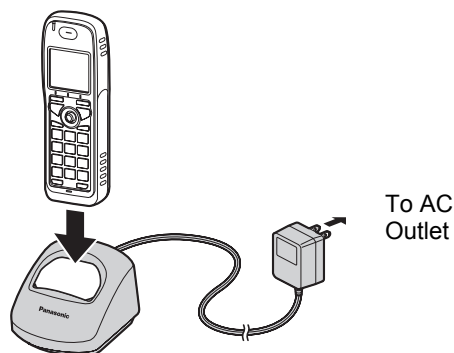


- When the battery has been completely charged, the charge indicator will change from red to green. For more information, refer to "Battery Information" on page 67.
- It is normal for the handset and charger to feel warm while the battery is charging.
- Keep devices sensitive to magnetic fields away from the charger.
- Use only the included charger.

Charger Wall Mounting



1. Install the two included screws in the wall, spacing them 25 mm (1 in) apart.

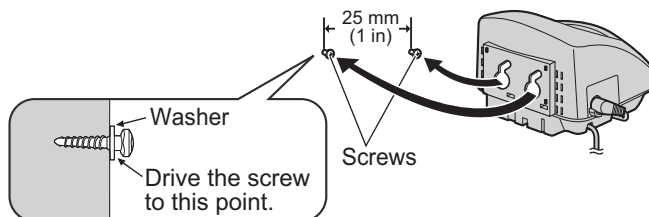

2. Mount the charger securely on the wall.


- Make sure that the wall that the charger will be attached to is strong enough to support the weight of the handset and charger (270 g [0.6 lb]). If not, it is necessary for the wall to be reinforced.
- When this product is no longer in use, make sure to detach it from the wall.

Attaching the Belt Clip

You can attach the handset to your belt by following the steps below.

[To attach]

Allows phone straps and similar objects to be connected.



Insert the clip into the designated notches in the handset.


[To remove]




Remove the belt clip.

Location of Controls


The headset is an option.
Please use only a
Panasonic headset below.
KX-TCA86/KX-TCA91/
KX-TCA92



Open the cover.

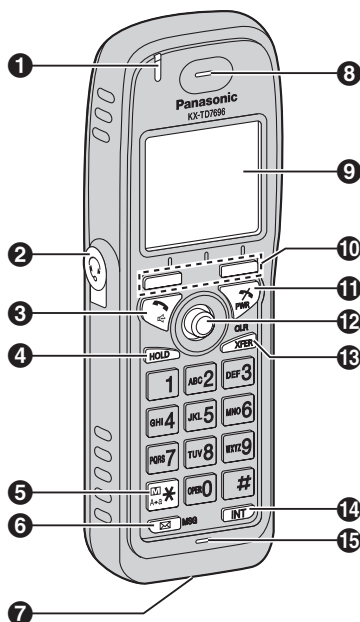

[Back View]



Speaker

11 Press **POWER** for more than 2 seconds.


[Power On]

Standby mode

[Power Off]

Blank display

12



Down

You can use the Joystick to move the cursor in the desired direction. Press the center button to confirm a selection.

1 Ringer/Charger Indicator

2 Headset Jack

3 TALK/SP-PHONE (Speakerphone) Key

Used to make or answer calls, or toggle between the Receiver/Hands-free^{*1} mode during a conversation.

4 HOLD Key

Used to place a call on Hold.

5 Meeting Mode Key

Used to turn Meeting Mode on or off when pressed for more than 2 seconds in standby mode.

For more information, refer to "Meeting Mode" on page 10.

6 Message Key

Used to leave a message waiting indication, or to call back the party who left a message waiting indication.

7 Charge Contact

8 Receiver

9 Display

Refer to "Display" on page 16.

10 Left/Right Soft Key

Used to select the function displayed directly above each key. Functions are displayed based on the current context.

11 POWER/CANCEL Key

Used to end calls, exit the Phonebook or Function mode, or turn the handset on or off.

12 Joystick

Used to adjust the ringer/receiver volume, select Function menus and the function displayed directly above it, and to move the cursor to select a desired item.

13 TRANSFER/CLEAR Key

Used to transfer a call to another party, or to clear digits or characters.

14 INTERCOM Key






Used to make or answer intercom calls.

15 Microphone

^{*1} You can talk with the other party alternately through the speaker in a quiet room. During a conversation using a headset, Hands-free mode does not work.

Key Lock

You can lock all keys other than the Joystick while the handset is in standby mode.

MENU	
	
Press the Joystick for more than 2 seconds to lock/unlock.	
[Display Icon]	
Unlocked	Locked
	
	

Before Operating the Handset

Meeting Mode

Meeting Mode allows you to turn off the ringer and set the handset to vibrate when calls are received. This can be useful in situations where you do not want to be disturbed, such as during a meeting.

When Meeting Mode is active, the microphone's sensitivity is increased, and the following features are turned off automatically, regardless of their settings.

- Ringer Volume
- Ring On Charger
- Auto Answer
- Key Tone
- Range Alarm
- Low Battery Alarm

- If you set the handset on the charger during Meeting Mode, the handset will not vibrate^{*1}.

^{*1} Please note that if you set the handset on the charger while receiving an incoming call, vibration will stop. Once the vibration stops, the handset will not vibrate again for that call, even if the handset is lifted up again. (If Quick Answer is set, lifting up the handset will answer the call.)

Residential Mode and Office Mode

You can choose one of the following modes depending on how you intend to use the handset:

- Residential Mode
This mode is designed for residential use.
- Office Mode
This mode is designed for business use.

Note

The soft keys and procedures vary depending on the mode.


Please note that the soft keys and procedures in this manual are based on Residential mode.

For details about soft keys differences, see "Soft Keys" on page 17.

For details about procedure differences, see "Operation Outline for Residential Mode" on page 19 and "Operation Outline for Office Mode" on page 20.

Selecting the Display Language


You can select the desired language (English/Spanish/French).

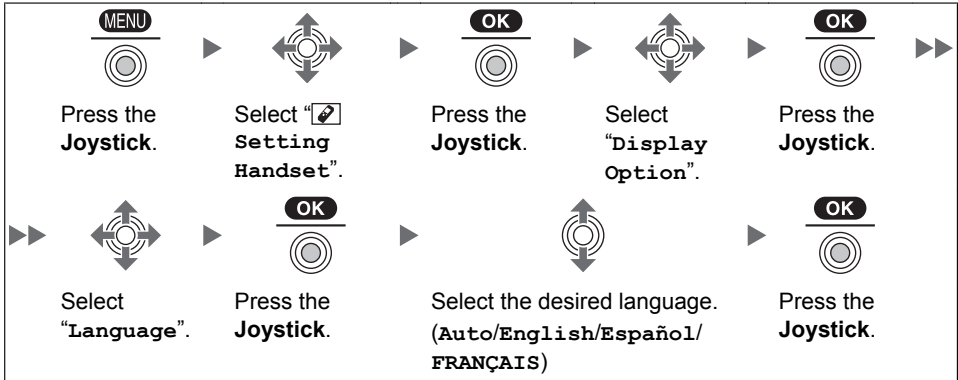

- When set to "Auto", the language settings of the PBX will be used.
- The display language of both the handset and PBX can be selected, and both should be set to the same language. For more information, refer to the user documentation for your PBX.

Editing the Standby Display Name


You can edit the name of the standby mode display of the handset.

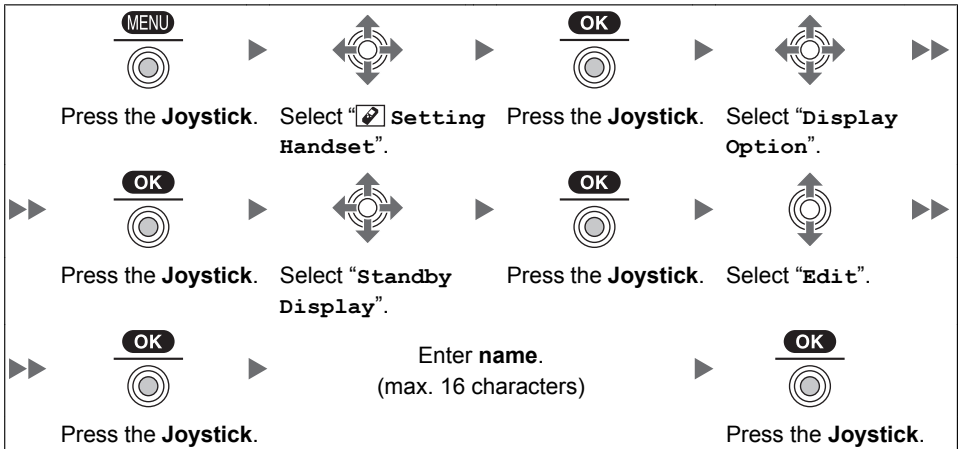

- To enter characters, see page 48.


Editing the Names of the Flexible CO Keys

You can edit a name for each flexible CO key of the handset.

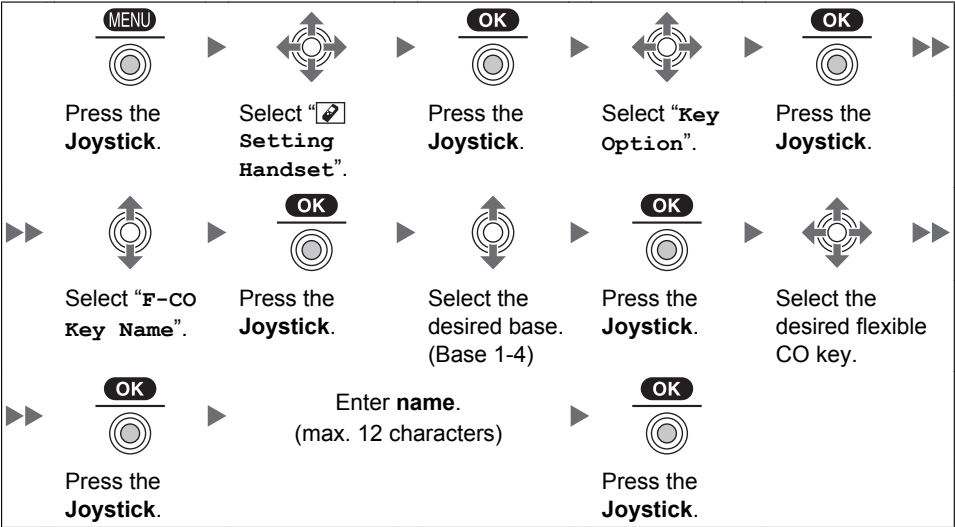


- To enter characters, see page 48.

Adjusting the Ringer Volume

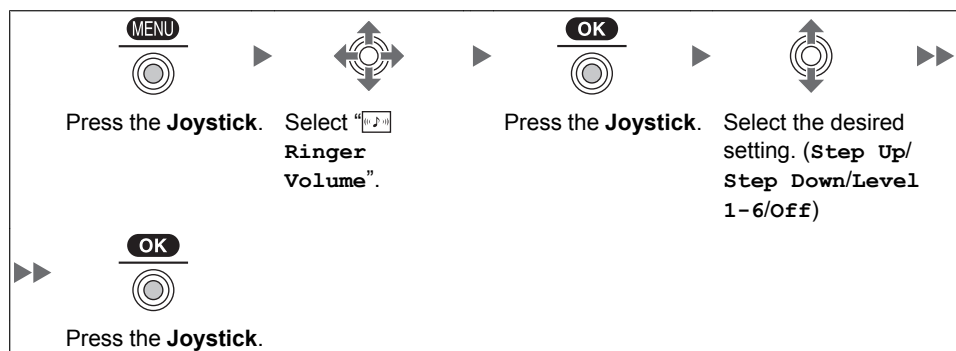

- To set the ringer pattern, see page 56.


Adjusting the Ringer Volume or Turning the Ringer off while Ringing

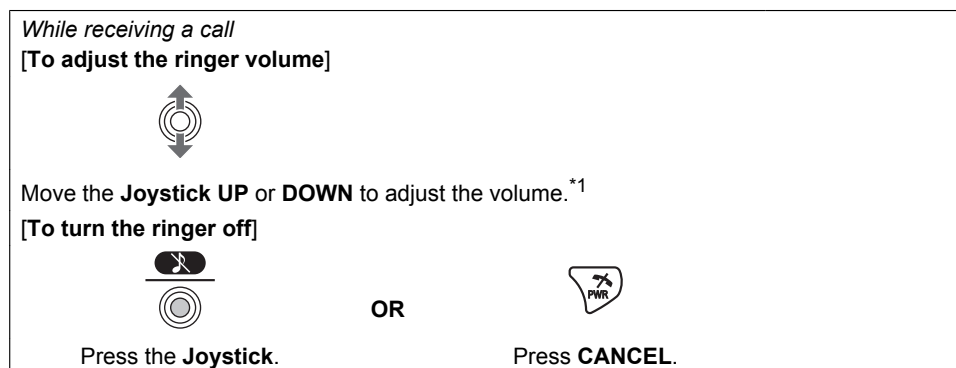

^{*1} The adjusted volume level will also be used for subsequent calls.

- If you attach the headset while receiving an incoming call, the ring from the handset does not switch to the headset. If you attach the headset before receiving an incoming call, and headset tone is set to on, a tone will be heard from the headset. If Vibrate is set to on, the handset will vibrate whether a headset is attached or not.

Changing the Vibrate Setting

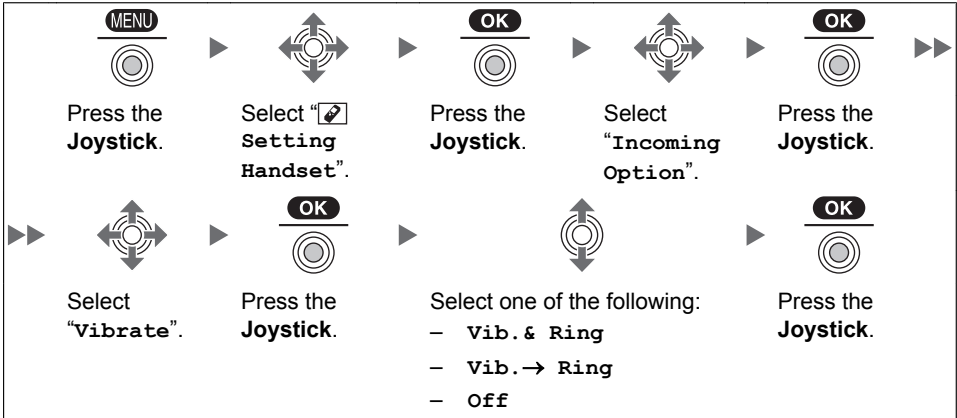

- To set Vibrate only, without ringing, select "**Vib. & Ring**" and set the Ringer Volume to off, or turn Meeting Mode on. (See page 10, 13.)

Adjusting the Receiver/Speaker/Headset Volume


During a conversation




Move the Joystick **UP** or **DOWN** to adjust the volume.

(Receiver Volume—Level 1-4, Speaker Volume—Level 1-6, Headset Volume—Level 1-4)


Changing the Usage Mode (Residential Mode/Office Mode)

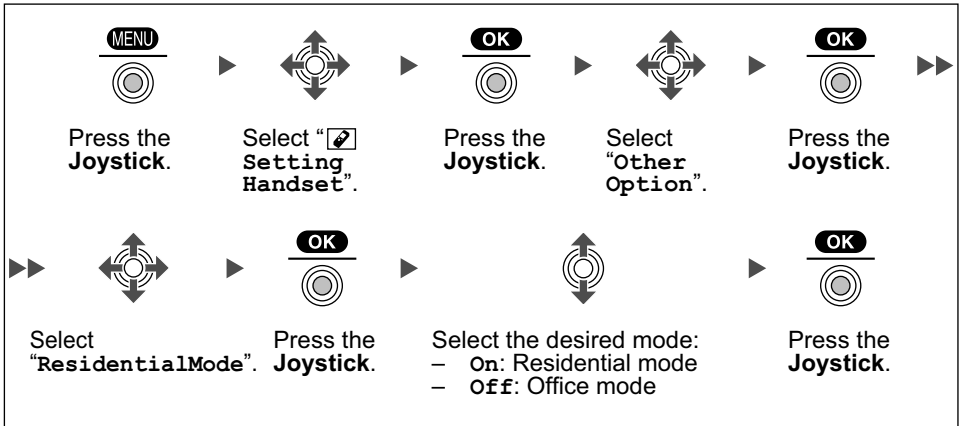


Display

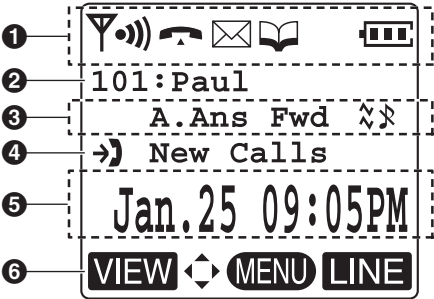


- 1




Within range of a Cell Station (CS)




Out of range




Intercom Indicator



Off-hook Status




Message Waiting




Phonebook


Battery Indicator*1



Full



Low



Needs to be charged.
- 2

Extension Number and Name
To edit the standby display name, see page 11.

3

A.Ans


Auto Answer

Fwd


Call Forwarding (See page 35.)

DND


Do Not Disturb (See page 35.)



Ringer Volume OFF (See page 13.)



Meeting Mode (See page 10.)



Vibrate (See page 14.)

4

Incoming Call Log Status

5

Date and Time Display

6



























Soft Keys (See page 17.)

*1 Refer to "Battery Information" on page 67.

















16

Soft Keys

Icons and information shown on the display will vary depending on the context. To select an item shown on the display, press the corresponding soft keys.

	Opens the Handset Phonebook. Pressing this key for more than 2 seconds locks the Phonebook. *1		Displayed when in Special character entry mode. Pressing this key switches to Alphabetic character entry mode.
 *2	Displayed when in Phonebook Lock. Pressing this key and then entering the password (default: 1234), unlocks the Phonebook temporarily. Pressing for more than 2 seconds, then entering the password (default: 1234), unlocks the Phonebook.		Inserts a dialing pause.
	Stores a new item in the Phonebook.		Clears digits or characters.
	Opens the PBX System Phonebook.	  *2	Turns the microphone mute on or off during a conversation. Flashes when Mic Mute is on.
	Opens the PBX Extension Phonebook.		Turns the ringer off.
	Displays the caller information stored in the Handset Phonebook while receiving a call.	  *2	Opens the main menu. Pressing this key for more than 2 seconds locks all keys.
	Displays the caller information stored in the system while receiving a call.	  *2	Returns to the previous display.
 *2	Establishes a multiple-party conversation (Conference).	  *2	Opens the list menu (edit/delete in the Phonebook, etc.).
	Searches for an item in the Phonebook alphabetically.		Confirms the entry.
	Displayed when in Alphabetic character entry mode. Pressing this key switches to Numeric character entry mode.		Displayed when in Key Lock mode. Pressing this key for more than 2 seconds unlocks the keys.
	Displayed when in Numeric character entry mode. Pressing this key switches to Special character entry mode.		Advances to the next display.

Before Operating the Handset


	Displays the Outgoing Call Log.		Used to clear the Memo Alarm display setting.
 *2	Displays the last dialed number.		Used to enter an “x” when storing the Line Access CD.
	Opens the Incoming Call Log.	  *2	Disconnects the current call and make another call without hanging up.
	Opens the Incoming Call Log Group.		Used to register the handset with the PBX simply.
	Used to select an item when in setting mode.		Displayed when it is possible to use an arrow key to make a selection.
	Used to select AM or PM when setting the Memo Alarm feature.	 	Displayed when the corresponding soft key has no function.
	Display a list of flexible CO keys.		Display a list of Phonebooks and call logs.

*1 This function is only available in Office mode.

*2 This soft key appears only in Office mode.

Operation Outline for Residential Mode

Handset functions are accessed through the display menu and selected with the Joystick and soft keys.

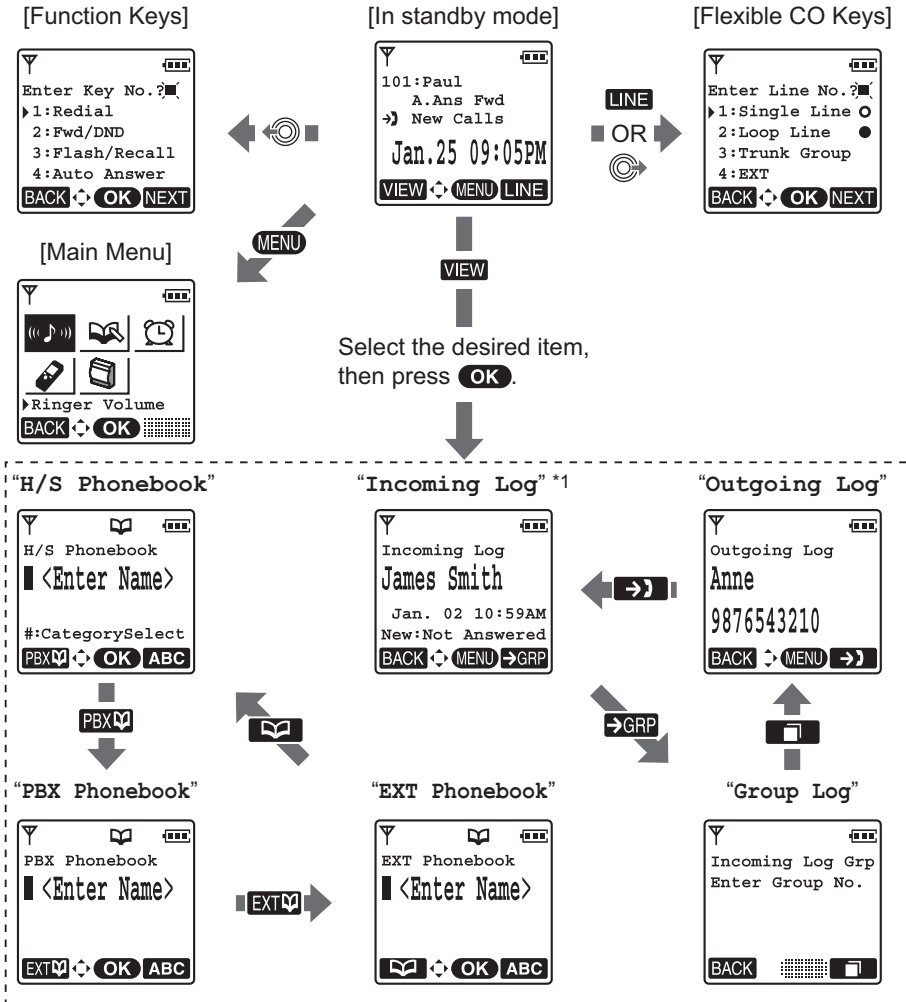


*1 Moving the Joystick  displays the phone number.

- To enter characters, see page 48. To search for an item stored in the Phonebook, see page 28.

Operation Outline for Office Mode

Handset functions are accessed through the display menu and selected with the Joystick and soft keys. The guidance display is shown in standby mode for easy operation.

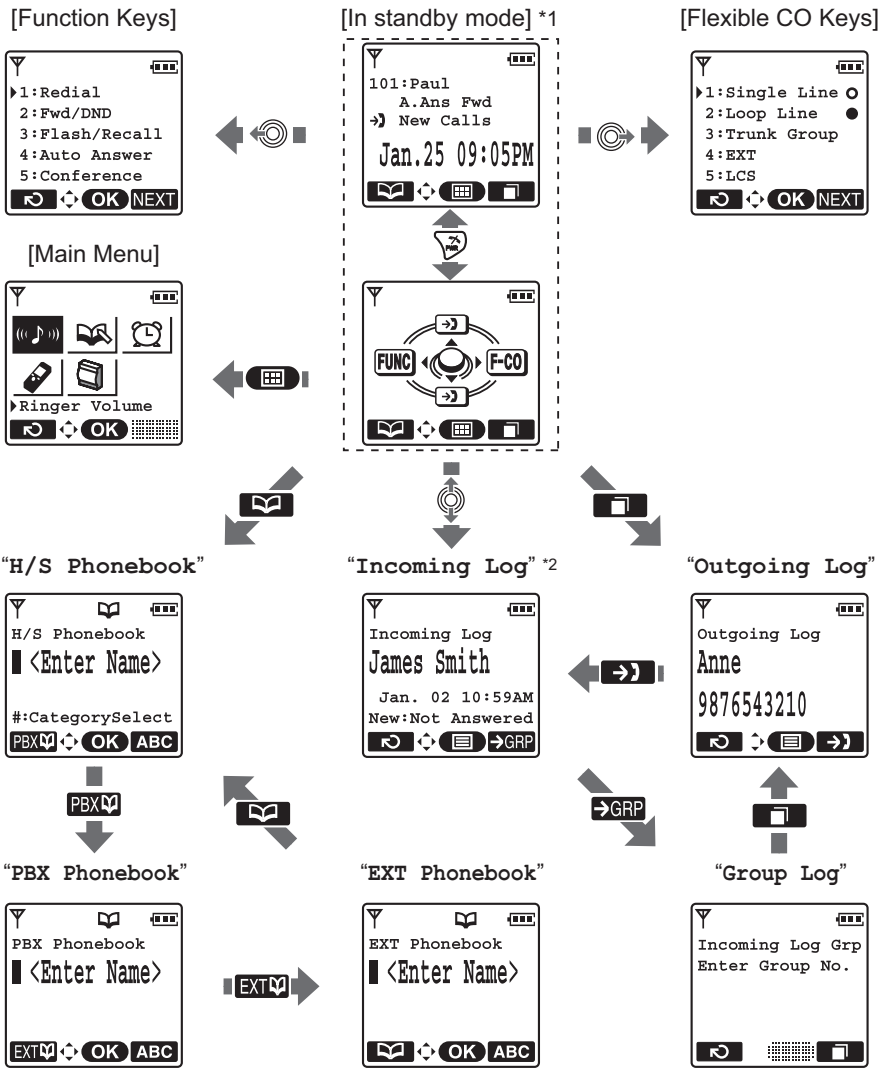

*1 You can select whether the guidance display is shown or not. (See page 59.)


*2 Moving the Joystick  displays the phone number.

- To enter characters, see page 48. To search for an item stored in the Phonebook, see page 28.

Function Menus

Press the Joystick to display the main and sub menus.

Main Menu—While in Standby Mode



Ringer Volume:

Accesses the “**Ringer Volume**” setting.



New Phonebook:

Stores a new item in the Phonebook.



Memo Alarm:

Accesses the “**Memo Alarm**” settings.




Setting Handset:

Accesses the “**Setting Handset**” settings.




PBX Program:

Enters PBX Personal Programming mode.

For PBX Personal Programming, refer to the user documentation for your PBX. Press  to exit from PBX Personal Programming mode.

Sub Menu—While Off-hook/During a Conversation



Phonebook:

Opens the Phonebook.



New Phonebook:

Stores a new item in the Phonebook.



Outgoing Call Log:


Enters the Outgoing Call Log.





Incoming Call Log:

Enters the Incoming Call Log.

Function Keys

Functions of the handset can be activated through the display key list.
Move the Joystick  to display the feature key list.



1: Redial

Redials the last dialed number.

2: Fwd/DND

Displays and/or sets Call Forwarding and Do Not Disturb.

3: Flash/Recall

Disconnects the current call and make another call without hanging up.

4: Auto Answer

Answers an incoming call automatically in hands-free mode. "A. Ans" is displayed in standby mode.

5: Conference

Establishes a multiple-party conversation.


6: Pause

Inserts a dialing pause.

















7: Auto Dial

Makes a call through PBX Personal/System Speed Dialing.

0: PBX Program



Enters PBX Personal Programming mode. Press  to exit from PBX Personal Programming mode.

- For PBX Personal Programming, refer to the user documentation for your PBX.


Shortcut Combinations			
 	Redial	 	Conference
 	Fwd/DND	 	Pause
 	Flash/Recall	 	Auto Dial
 	Auto Answer	 	PBX Program

- For operation, see page 24.
- To edit the function key list, see page 58.

Flexible CO Keys

A flexible CO key can be used either to seize a line in order to make or receive an outside call (F-CO key), or used as a function key. Press  or move the Joystick  to display the flexible CO key list. Here you can access the 12 flexible CO keys. The icon shown beside each F-CO key indicates line status similarly to the LED indicators on a Proprietary Telephone; ● is the same as a green LED, and ○ is the same as a red LED.



[Example]
































Understanding the F-CO Key Icons*1

● (on):	You are currently using this line.
⋈● (flashing rapidly):	You have an incoming call on this line. (An outside call is coming in on a single extension.)
⋈● (flashing slowly):	You have a call on hold on this line.
○ (on):	This line is in use by someone else.
⋈○ (flashing rapidly):	You have an incoming call on this line. (An outside call is coming in on multiple extensions simultaneously.)
⋈○ (flashing slowly):	Someone has a call on hold on this line.
(no icon):	This line is idle.

*1 The meanings of these icons vary depending on the status of the CO line.


- To select a key, press its key number, or move the Joystick  to select the desired key and press .
- To edit the names of flexible CO keys, see page 12.
- For more information, refer to the feature documentation for your PBX.

Making Calls


Calling	
To an extension	 ► Extension No. ► 
To an outside party	
To use the Line Access Numbers	 ► <div><div></div><div>OR</div><div> ► CO Line Group No.</div></div> ► Outside Phone No. ► 
To use Flexible CO Keys	<div><div><div></div><div>OR</div><div></div></div> ► <div><div> (idle CO key no. [0-9, *, #])</div><div>OR</div><div><div> (idle CO key) ► <div></div><div></div></div></div></div> ► Outside Phone No. ► </div>
To use Hot Key Dial*1	 (Press the dialing key assigned as a Hot Key for more than 1 second.) ►  ►  ► 
To use the Outgoing Call Log*2	 ►  ►  ►  ►  ►  Select "Outgoing Log".
To use the Incoming Call Log	 ►  ►  ►  ►  ►  Select "Incoming Log".

Calling


To use the Incoming Call Log Group

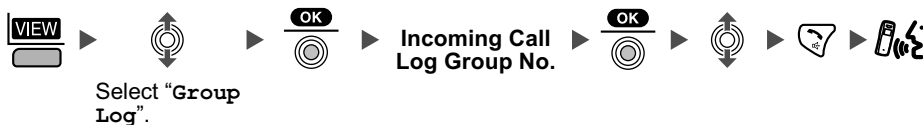

To use the Handset Phonebook*³

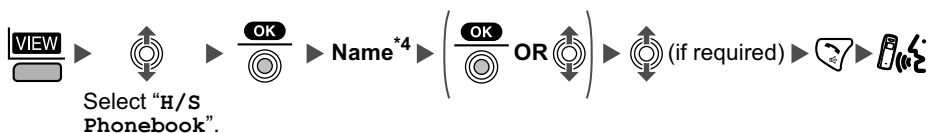



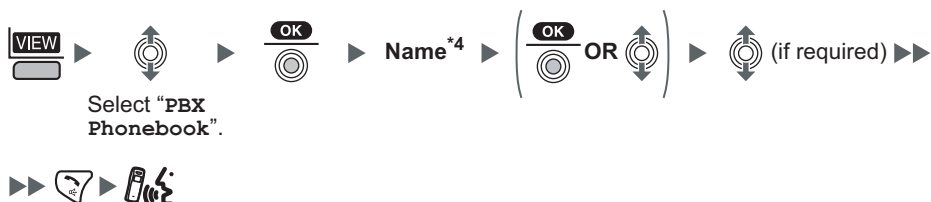






















































To use the PBX System Phonebook*² *³







To use the PBX Extension Phonebook*³



One-touch Dialing	
To store	<div><div><div><div><div></div><div>▶</div><div></div><div><div><div></div><div>PBX Program</div></div></div><div>▶</div><div><div><div></div><div>OK</div></div></div></div></div><div>OR</div><div><div><div></div><div>▶</div><div><div><div></div><div>F-CO</div></div></div></div></div></div><div><div><div></div><div>▶</div><div></div><div>(F-CO Key)</div><div>▶▶</div></div></div><div><div><div></div><div>OK</div></div><div>▶</div><div><div><div></div><div>2</div></div></div><div>▶</div><div>Desired No.</div><div>▶</div><div><div><div></div><div>OK</div></div></div></div></div>
To dial	<div><div></div><div>▶</div><div></div><div>▶</div><div></div><div>(One-touch Dialing key)</div><div>▶</div><div><div><div></div><div>OK</div></div></div><div>▶</div><div></div></div>
Hot Line	
To store	<div><div></div><div>▶</div><div><div><div><div></div><div>▶</div><div><div><div></div><div>7</div></div></div><div>▶</div><div><div><div></div><div>4</div></div></div><div>▶</div><div><div><div></div><div>0</div></div></div><div>▶</div><div><div><div></div><div>2</div></div></div><div>▶</div><div>Desired Phone No.</div><div>▶</div><div><div><div></div></div></div><div>▶</div><div></div></div></div></div></div>
To set/cancel	<div><div></div><div>▶</div><div><div><div><div></div><div>▶</div><div><div><div></div><div>7</div></div></div><div>▶</div><div><div><div></div><div>4</div></div></div><div>▶</div><div><div><div></div><div>0</div></div></div></div></div><div><div><div><div><div></div><div>1</div><div>Set</div></div></div><div><div><div></div><div>0</div><div>Cancel</div></div></div></div></div><div>▶</div><div></div></div></div>
To dial	<div><div></div><div>▶</div><div></div></div>
Operator Call	
	<div><div></div><div>▶</div><div><div><div></div><div>0</div></div></div><div>▶</div><div></div></div>
System Speed Dialing	
To dial	<div><div></div><div>▶</div><div><div><div><div></div><div>▶</div><div><div><div></div></div></div></div></div><div>▶</div><div>System Speed Dial No. (3 digits)</div><div>▶</div><div></div></div></div>
Doorphone Call	
	<div><div></div><div>▶</div><div><div><div><div></div><div>▶</div><div><div><div></div><div>3</div></div></div><div>▶</div><div><div><div></div><div>1</div></div></div></div></div><div>▶</div><div>Doorphone No. (2 digits)</div><div>▶</div><div></div></div></div>

Automatic Callback Busy	
To set <i>While hearing a busy tone</i>  ► 	To cancel  ►    ► 
To answer from an idle extension <i>While hearing a callback ring</i>  ► 	To answer from an idle CO line <i>While hearing a callback ring</i>  ► Outside Phone No. ► 


- *1 To assign a phone number to a Hot Key, see page 47.
 - *2 When a call is made using the PBX System Phonebook, the called party's name is not stored in the Outgoing Call Log. To log the name as well as the number, copy the item into the Handset Phonebook before dialing it. (See page 45.)
 - *3 To store an item in the Phonebook, see page 41.
To search for an item stored in the Phonebook, see page 28.
 - *4 This step can be omitted.
- To enter characters, see page 48.
 - You can confirm that the number was dialed correctly before calling (**Predialing**) by entering the number, then pressing .
 - To clear an entire number while predialing, press  for more than 1 second.
 - If an outside call is received from a phone number stored in the Handset Phonebook, the number and name of the caller will be displayed in the call log.
 - To cancel dialing, press .
 - If “” flashes, move closer to the CS and dial again.
 - For more information, refer to the user documentation for your PBX.

Searching for an Item Stored in the Phonebook


You can search for an item in the Phonebook by following the steps below.

Handset Phonebook


Scrolling through all items




▶




▶





▶




Press the **Left Soft Key**.

Select "**H/S Phonebook**".


Press the **Joystick**.

Press the **Joystick UP** or **DOWN** repeatedly.


Searching by name or first character(s) of name




▶



▶







▶

Enter name or first character of the desired name.


▶▶






▶

OR



▶



Press the **Joystick**.

Move the **Joystick UP** or **DOWN**.

Select the desired item. (if required)

Searching by category



▶



▶





▶



▶



▶▶





▶

Enter name.*1

▶





▶

OR



▶




Press the **Joystick**.

Move the **Joystick UP** or **DOWN**.

Select the desired item. (if required)


*1 This step can be omitted.

- To enter characters, see page 48.


- While an item is displayed you can:
 - Return to the “<Enter Name>” display by pressing , then search for another item.
 - Search for another item by pressing the dial key that corresponds to the letter you are searching for. If there is no entry that corresponds to the letter you selected, the next entry will be displayed.


PBX System Phonebook

Scrolling through all items

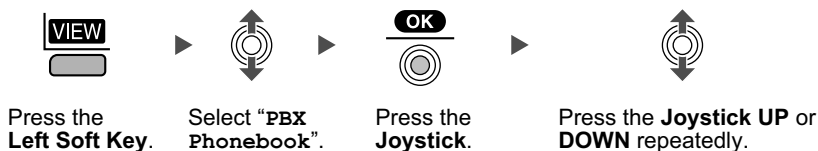


Searching by name or first character(s) of name

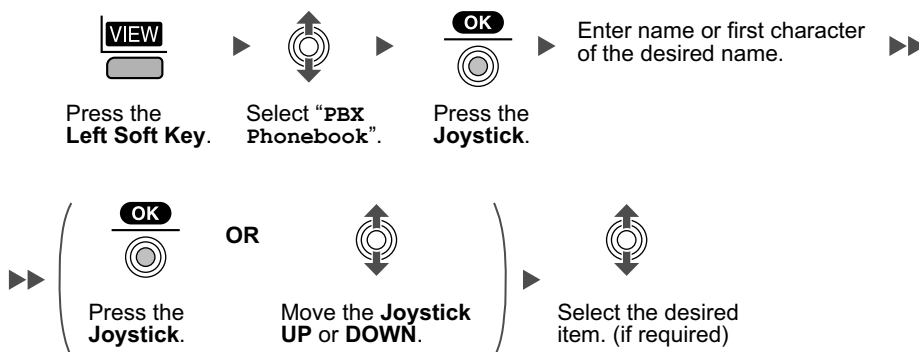

- To enter characters, see page 48.
- While an item is displayed you can:
 - Return to the “<Enter Name>” display by pressing , then search for another item.
 - Search for another item by pressing the dial key that corresponds to the letter you are searching for. If there is no entry that corresponds to the letter you selected, the next entry will be displayed.


PBX Extension Phonebook

Scrolling through all items




Press the
Left Soft Key.

▶




Select “**EXT**
Phonebook”.

▶




Press the
Joystick.

▶




Press the **Joystick UP**
or **DOWN** repeatedly.

Searching by name or first character(s) of name




Press the
Left Soft Key.

▶



Select “**EXT**
Phonebook”.

▶




Press the
Joystick.

▶


Enter name or first
character of the
desired name.

▶▶




Press the
Joystick.

OR




Move the **Joystick**
UP or **DOWN**.

▶



Select the desired
item. (if required)

- To enter characters, see page 48.
- While an item is displayed you can:
 - Return to the “<Enter Name>” display by pressing , then search for another item.
 - Search for another item by pressing the dial key that corresponds to the letter you are searching for. If there is no entry that corresponds to the letter you selected, the next entry will be displayed.

Receiving Calls

Receiving


An Intercom Call/An Outside Call/An Group Call




An Intercom Call



An Outside Call on a specific line

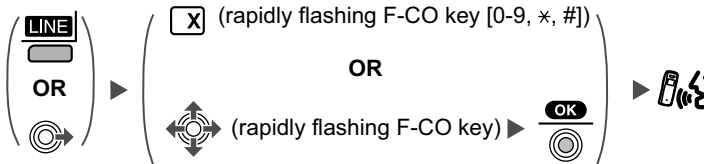

Call Pickup

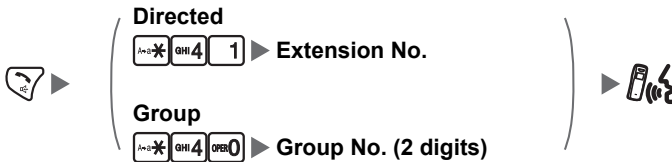


- You can also answer a call with the following features:
 - Any Key Answer (See page 58.)
 - Quick Answer (See page 58.)
 - Auto Answer (See page 58.)
- You can select the ringer, LED, and vibrate pattern for each type of incoming call. (See page 56.)
- For more information, refer to the user documentation for your PBX.


Caller ID




If an outside call that contains Caller ID information (a caller's name and telephone number) is received, this information will be logged in the incoming call log and displayed on the handset in one of the two following ways.

- If the caller's information is stored in the PBX, that information can be displayed.



- If the caller's information is stored in the handset, that information can be displayed.



- If information is stored in both the PBX and in the handset for the same caller, you can choose which information will be displayed on the handset. Caller information stored in the PBX is displayed by default. (See “**Caller ID Disp**” on page 59.) If you set the handset to display the caller information stored in the handset, caller information stored in the PBX will be displayed if the caller is not stored in the handset. When receiving a call, you can display the information stored in the handset by pressing , and display the information stored in the PBX by pressing .
- The caller information can be displayed even if a line access number, CO line number, or P () is stored in the Phonebook. (See “**Line Access CD**” on page 61.)

During a Conversation

Transferring a Call

To an extension



To an outside party



Holding

To hold (Regular Hold)



To hold (Exclusive Call Hold)




To retrieve a call

An Intercom Call



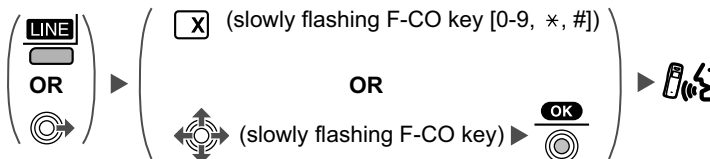

An Outside Call





Three-party Conference

To add another party during a conversation












Desired Phone No.





Select "Conference". Press the Joystick.




(Talk to the new party.)









Select "Conference".










(Talk with multiple parties.)


Press the Joystick.


To leave a conference












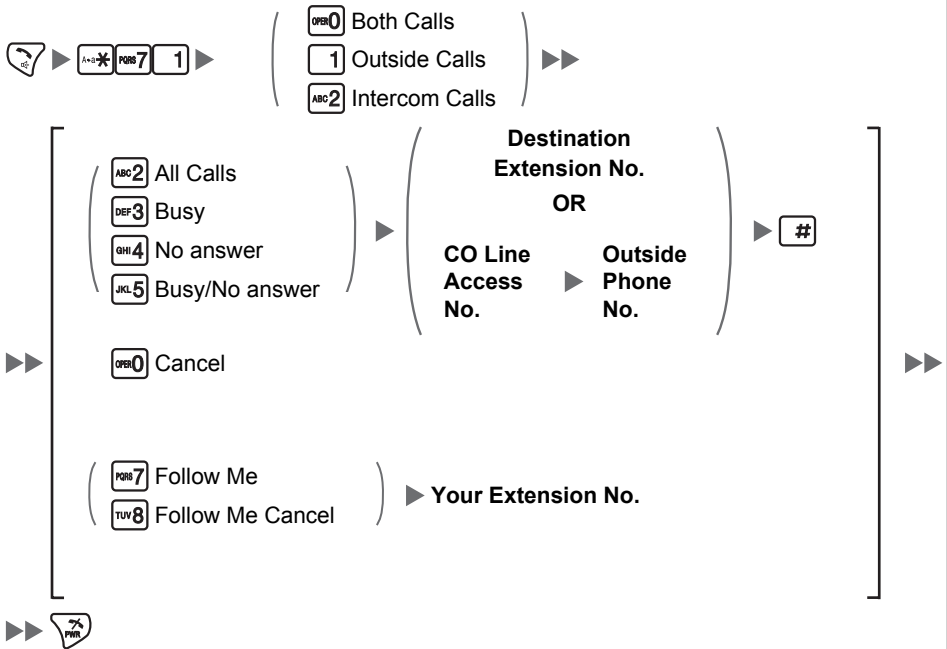
Select "Conference". Press the Joystick.

- To return to the call before the transfer destination answers, press .
- The method used to hold a call depends on the Call Hold mode (Regular Hold/Exclusive Call Hold). Ask your manager what the current mode is.
- When you hold several outside calls, you need to assign F-CO Keys (Single Line/Loop Line/Trunk Group) as necessary beforehand.
- For more information, refer to the user documentation for your PBX.


34

Useful Features

Call Forwarding




Do Not Disturb



Sending a Call Waiting Tone^{*1}

While hearing a busy tone

1 Wait for an answer. 

Call Waiting

To set/cancel for intercom calls



To set/cancel for outside calls




Call Waiting

To talk to the new party (*While hearing the Call Waiting tone*)

To terminate a current status



To hold and then talk to the new party

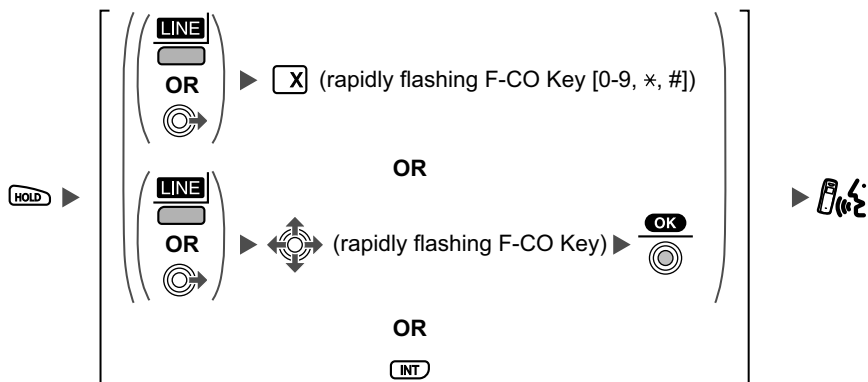


Disregard this step if both parties are extensions.

Paging

To page









►► Wait for an answer. ► 

To answer



Absent Message

To set

1 Will Return Soon

2 Gone Home

3 At Ext %%% + Extension no.

4 Back at %:% + Hour:Minute

5 Out until %:/% + Month/Day


6 In a Meeting

7

8

9

*2



Enter required no.





To cancel



















Log-in/Log-out

For Log-in


For Log-out


    



Specified
ICD Group* Extension No.

All





* ICD Group: Incoming Call Distribution Group

Extension Feature Clear








Extension Dial Lock*³

To lock








To unlock









* PIN: Personal Identification Number

Message Waiting

Caller

To leave a message waiting indication

When the called extension is busy or does not answer




To cancel a message waiting indication



Called extension

To call back

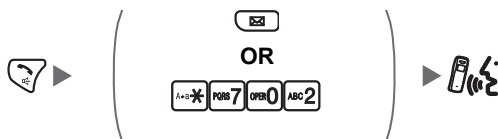


To clear message waiting indications left on your extension^{*4}




- *1 You cannot send a call waiting tone when
 - the called party has not set the Call Waiting feature.
 - the called party has set the Data Line Security feature.
- *2 Enter the desired value in the “%” positions. You must enter the correct number of characters as represented by the “%” using 0 to 9 or *.

To change the default messages and create your personal messages (Message no. 9), refer to the documentation for your PBX.
- *3 If you do not set an extension PIN, you cannot lock and unlock your extension.
- *4 You can register a flexible CO key to the clear message waiting indications feature (for one-touch operation).

To register

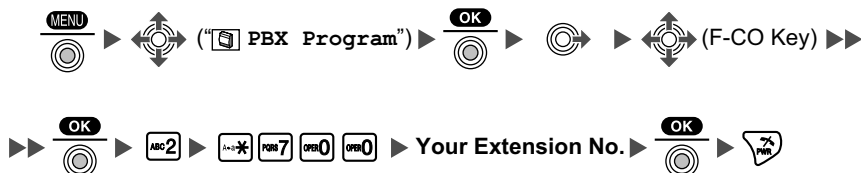

To clear message waiting indications (one-touch operation)




- For more information, refer to the user documentation for your PBX.

Making Use of the Voice Mail Service

Listening to a Message



From your own extension

 ► **VPS* Extension No.** ►►
 ►► **Mailbox Password*¹ + #**

- If you have no password, you can skip the last step.




* VPS: Voice Processing System

From someone else's extension







 ► **VPS Extension No.** ► **# MNO 6** ►►
 ►►  ► **Mailbox No.** ►►
 ►► **Mailbox Password*¹ + #**

- If you have no password, you can skip the last step.

KX-TVA series

- (
 **1** Listen to Message
 **2** Deliver Message
 **3** Mailbox Management
 **4** Automated Attendant
 **5** Message Notification
 **6** Other Features
 *** End Call**
)

KX-TVS series

- (
 **1** Listen to Message
 **2** Deliver Message
 **3** Check Mailbox Distribution
 **4** Automated Attendant
 **5** Mailbox Management
 **6** Other Features
 *** End Call**
)

Leaving a Message

 ► **VPS Extension No.** ►

From your own extension

Mailbox Password*¹ + #



From someone else's extension

MNO 6 ►  ► **Mailbox No.** ►►
 ►► **Mailbox Password*¹ + #**

- If you have no password, you can skip the last step.

►►  **2** ► Enter the desired mailbox no. ►  **2**  **1** ► Leave a message ►  **1**  **2** ►►

To send the message immediately



 **1**  **2** (KX-TVA series)

 **2** (KX-TVS series)

To set the delivery time

 **1**  **1**

► Follow the guidance

During Playback	
	Repeat Voice Guidance
	Exit Menu

- *1 For more information on the Mailbox Password, refer to the user documentation for the VPS.
- Some feature access numbers may vary depending on the market. Please consult your local dealer for the details.

Handset Phonebook

You can store up to 100 items with names, phone numbers, and category numbers in the handset for easy access. You can set unique Ringer/LED/Vibrate patterns for each category to identify incoming calls. All Phonebook items are stored in alphabetical order. For security purposes, you can lock the Phonebook. To make a call using the Phonebook, see page 24.

Note

We recommend that you keep a copy of your Handset Phonebook in case data becomes unrecoverable due to product malfunction.

Private Ring


You can organize entries in the Phonebook into one of 9 Private Ring Categories. It is possible to set a different ringer/LED/vibrate pattern*¹ for each category. When the displayed Caller ID*² matches a phone number or name stored in the Phonebook, the handset rings according to the Private Ring Category settings.

*¹ For Ringer/LED/Vibrate patterns, see page 56.

*² For Caller ID information, see "Caller ID" on page 32.

Storing an Item in the Handset Phonebook

Storing a New Item

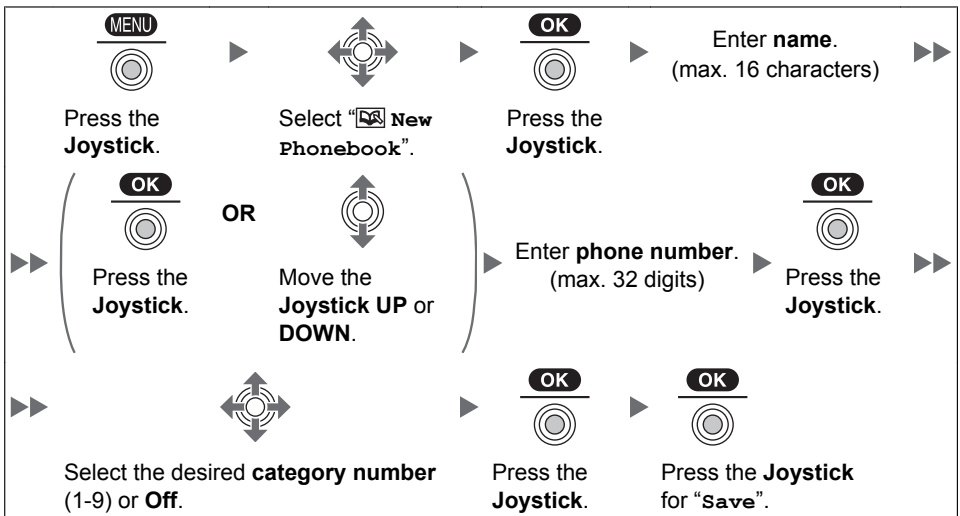


- To enter characters, see page 48.
- The valid digits are "0" through "9", "x", "#", "P (P icon)".







Using the Handset Phonebook

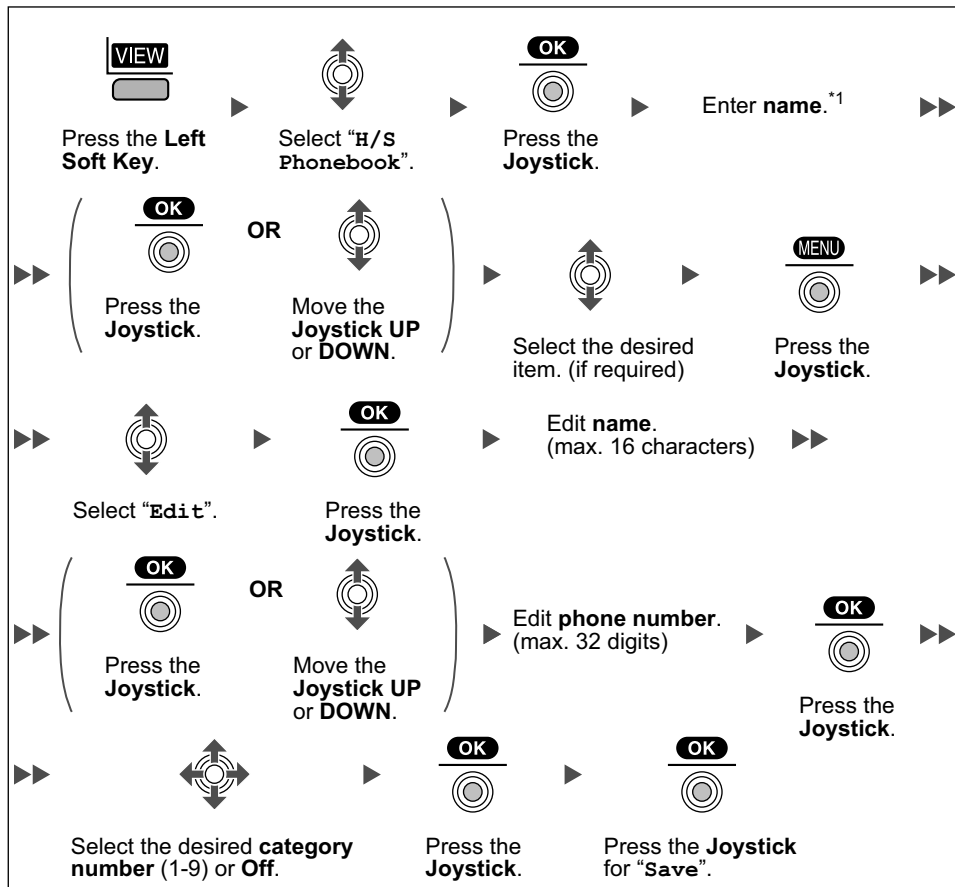- When storing an outside phone number, you should first store a line access number.


Editing a Stored Item




*1 This step can be omitted.

- To enter characters, see page 48.
- To search for an item in the Phonebook, see page 28.
- The valid digits are "0" through "9", "*", "#", "P ()".
- To change a character or digit, move the Joystick  to highlight it, press  to delete it, then enter the new character or digit.
- To clear an entire line, press  for more than 1 second.
- To move the cursor to the left or right, move the Joystick  or , respectively.

Storing an Item Using the Predialing

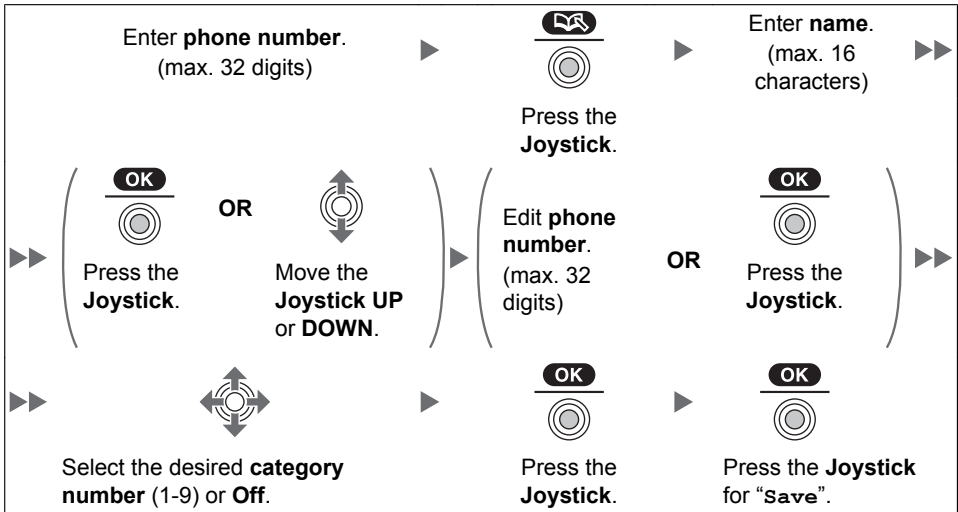


Storing an Item Using the Outgoing Call Log

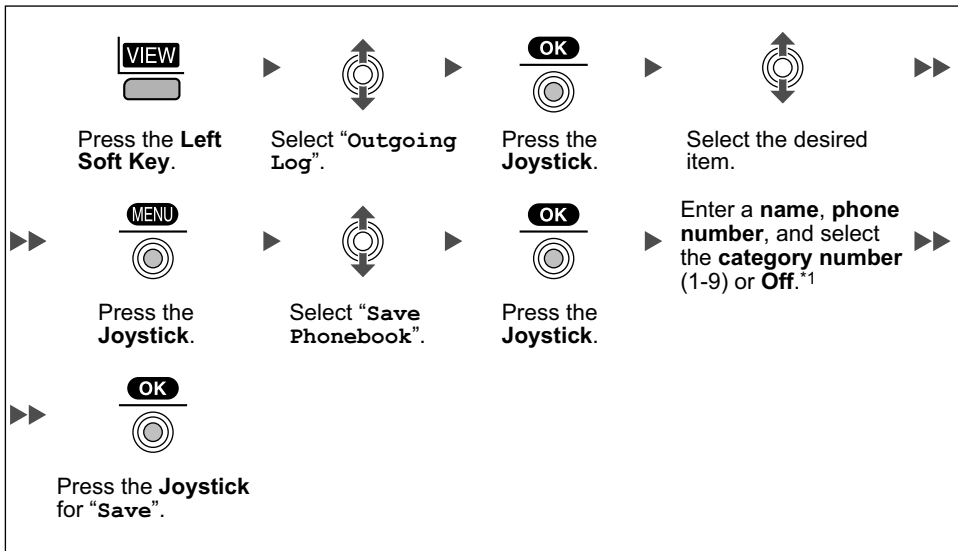


*1 Press to confirm each entry. (name: max. 16 characters/phone number: 32 digits)

- When storing an outside phone number, the line access number will be stored automatically. The line access number must be identical to the handset's "Line Access CD" setting (other Option). (See page 61.)


Storing an Item Using the Incoming Call Log

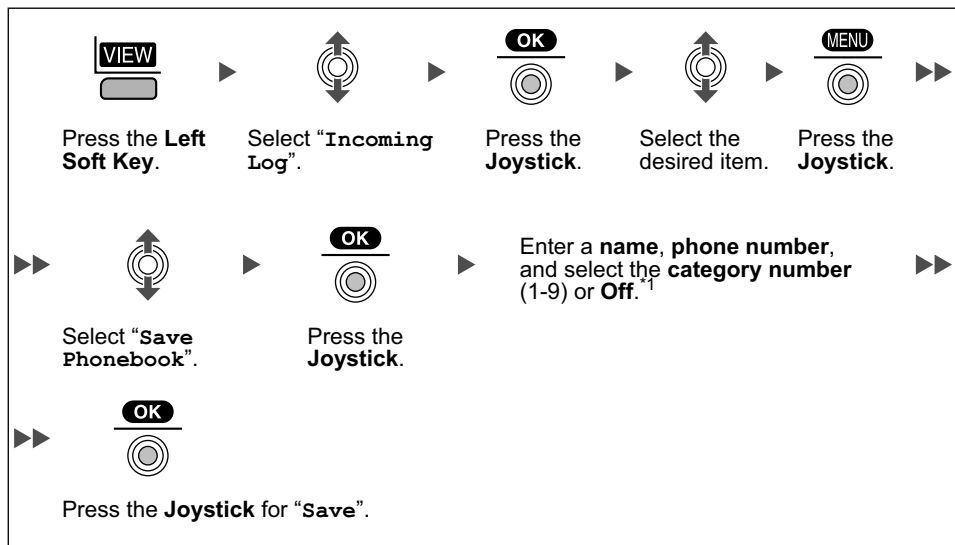


*1 Press  to confirm each entry. (**name**: max. 16 characters/**phone number**: 32 digits)

- When storing an outside phone number, the line access number will be stored automatically. The line access number must be identical to the handset's "**Line Access CD**" setting (**Other Option**). (See page 61.)

Storing an Item Using the PBX System Phonebook

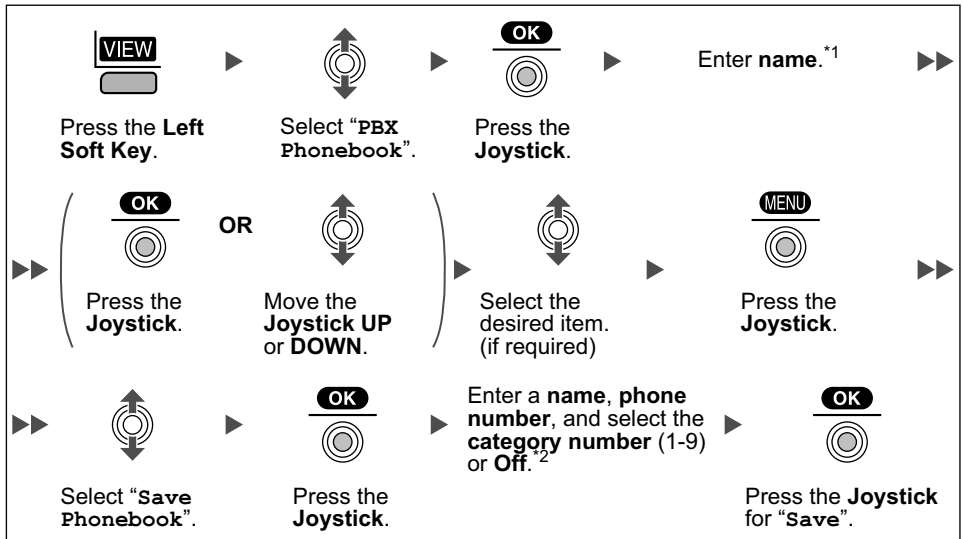


*1 This step can be omitted.


*2 Press  to confirm each entry. (**name**: max. 16 characters/**phone number**: 32 digits)

- To search for an item in the Phonebook, see page 28.

Storing an Item Using the PBX Extension Phonebook

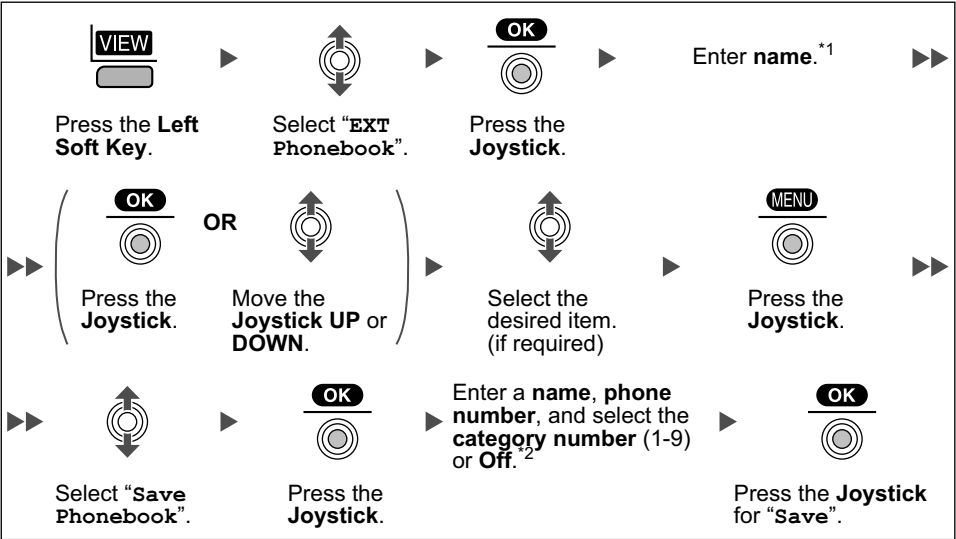


*1 This step can be omitted.

*2 Press  to confirm each entry. (**name**: max. 16 characters/**phone number**: 32 digits)

- To search for an item in the Phonebook, see page 28.


Editing Category Names

You can edit the names of the categories in the Handset Phonebook.

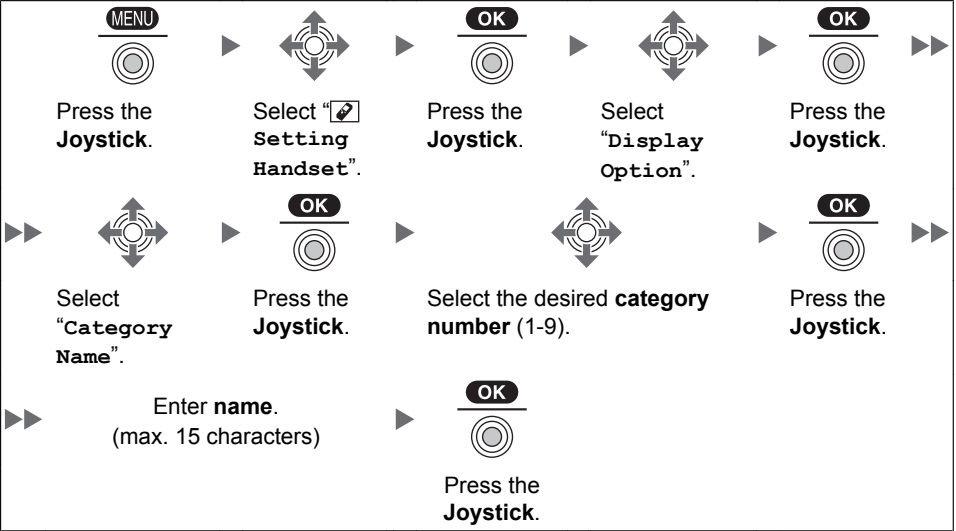

Assigning Hot Keys

You can assign a phone number stored in the Handset Phonebook to a key to be used as a Hot Key.


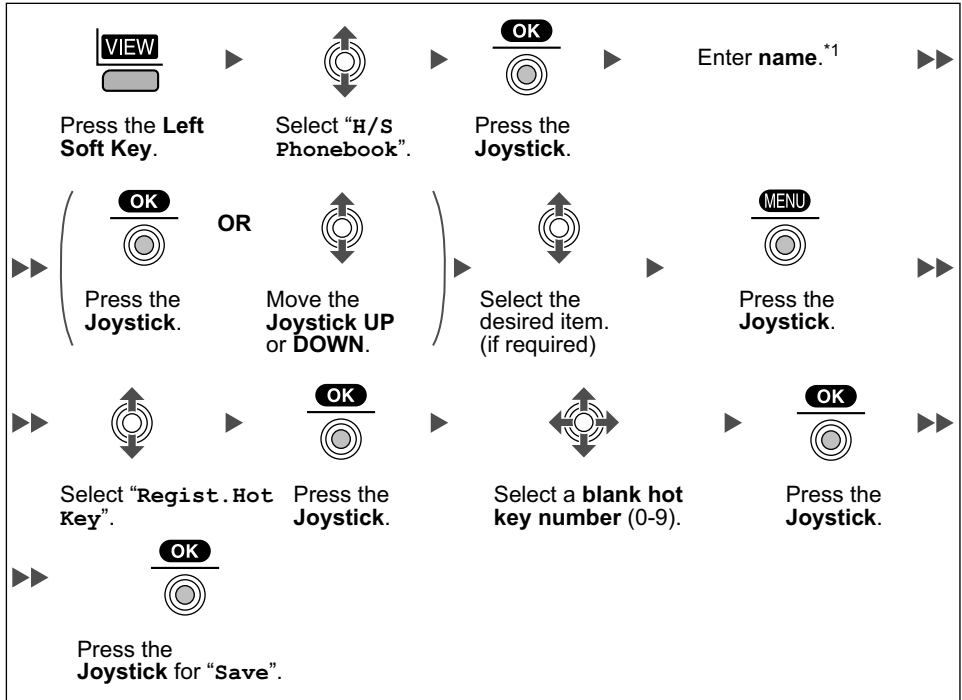


*1 This step can be omitted.

- To search for an item in the Phonebook, see page 28.
- A "✓" will be displayed next to hot key numbers that have a Phonebook item registered to them.

Entering Characters

You can enter characters and digits using the dialing keys.
You can select one of 3 character modes by pressing the **Right Soft Key** while entering a name. The function icon above the soft key displays the current character mode.
See “Character Mode Table” (page 49) for available characters.

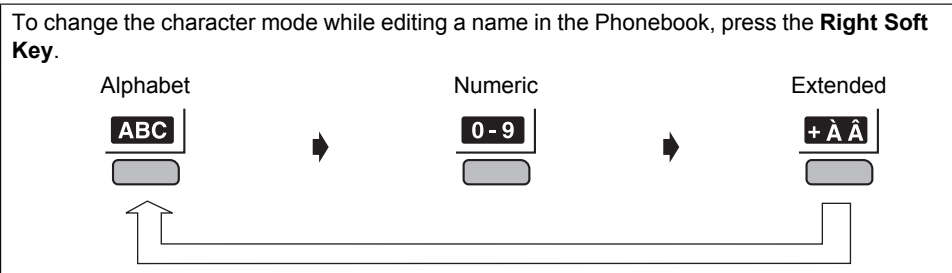













Example: To enter “Anne” in Alphabet Mode.



- To switch between uppercase and lowercase, press .
- To enter a character located on the same dialing key as the previous character, move the cursor by moving the Joystick , then enter the desired character.
- If you enter a different character by mistake, move the Joystick to highlight the character, press to delete it, then enter the correct character.
- To clear an entire line, press for more than 1 second.
- To move the cursor, move the Joystick .

Character Mode Table


Keys	ABC (Alphabet)	0-9 (Numeric)	+ÅÅ (Extended)
	Space # & ' () * , - . / 1	1	Space # & ' () * , - . / 1
	A B C 2	2	A Å Á Â Ã Ä Å Æ B C Ç 2
	a b c 2		a à á â ã ä å æ b c ç 2
	D E F 3	3	D E Ê Ë Ì Í Î Ï F 3
	d e f 3		d e è é ê ë ì í î ï f 3
	G H I 4	4	G Ğ H I Ì Í Î Ï Ñ 4
	g h i 4		g ğ h i ì í î ï ñ 4
	J K L 5	5	J K L 5
	j k l 5		j k l 5
	M N O 6	6	M N Ñ O Ó Ô Õ Ö Ø 6
	m n o 6		m n ñ o ò ó ô õ ö ø 6
	P Q R S 7	7	P Q R S Ş ß 7
	p q r s 7		p q r s ş ß 7
	T U V 8	8	T U Û Ü Ü Û V 8
	t u v 8		t u ù ú û ü v 8
	W X Y Z 9	9	W Ŵ X Y Ŷ Z 9
	w x y z 9		w ŵ x y ŷ z 9
	Space 0	0	Space 0

- Press  before or after entering a character to change between uppercase and lowercase.
- Pressing a key repeatedly will cycle through the characters associated with that key. For example, to enter the letter “C”, press  three times.


Locking the Handset Phonebook

You can lock/unlock the Phonebook while the handset is in standby mode.


Locking the Handset Phonebook

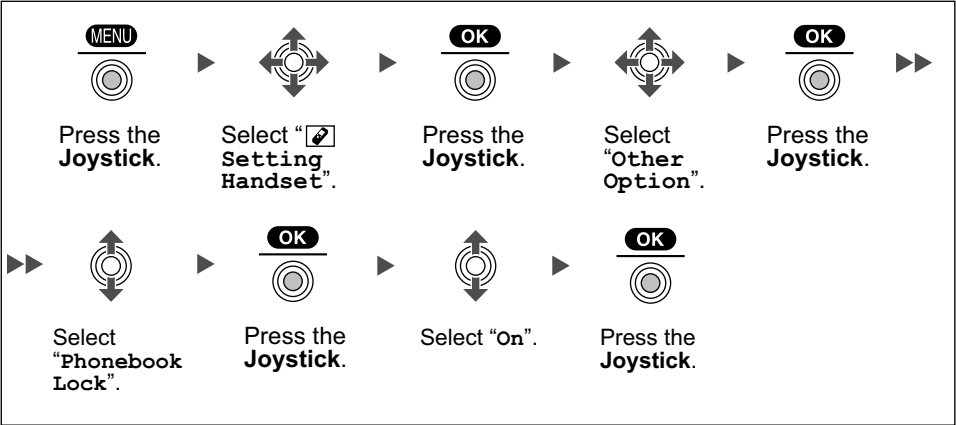

Unlocking the Handset Phonebook

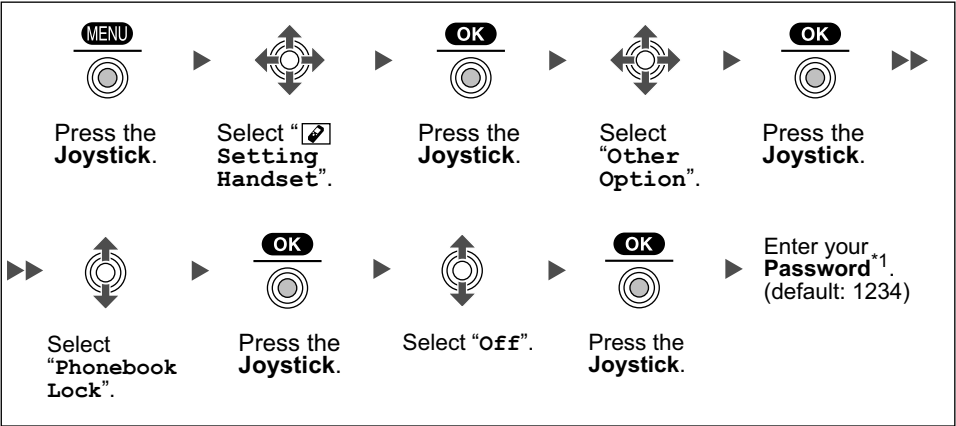


Unlocking the Handset Phonebook Temporarily

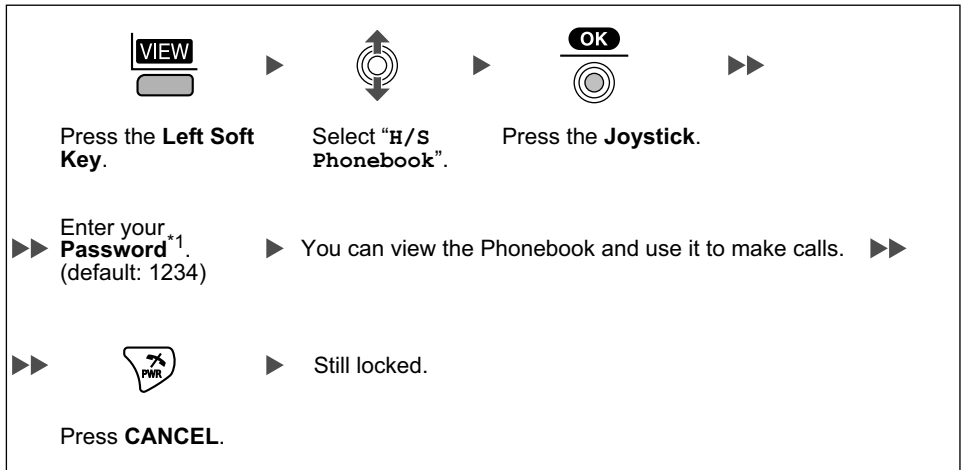

*1 To change the password, see page 61.


Deleting Stored Items in Handset Phonebook/Hot Key Dial/Outgoing Call Log/Incoming Call Log

Handset Phonebook

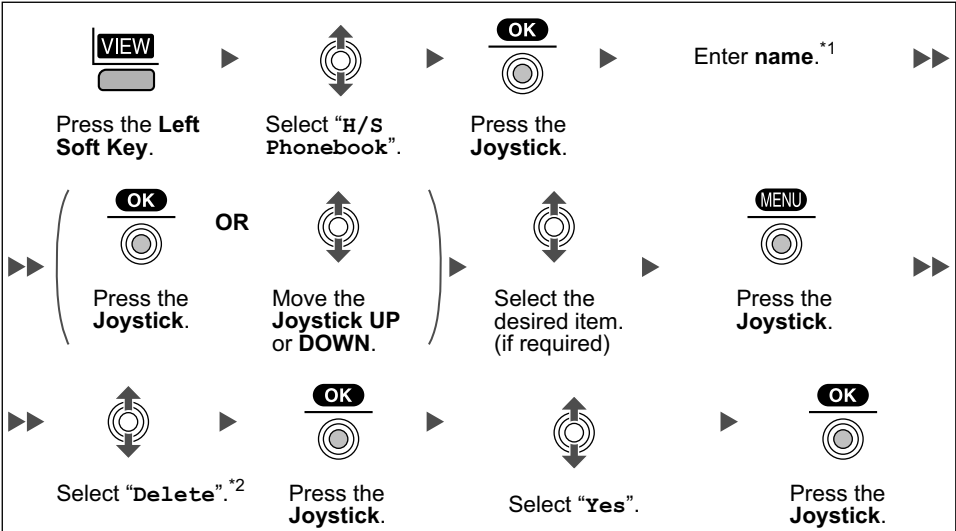

- *1 This step can be omitted.
- *2 Select **"Delete All"** if you want to delete all items.
- To search for an item in the Phonebook, see page 28.


Hot Key Dial

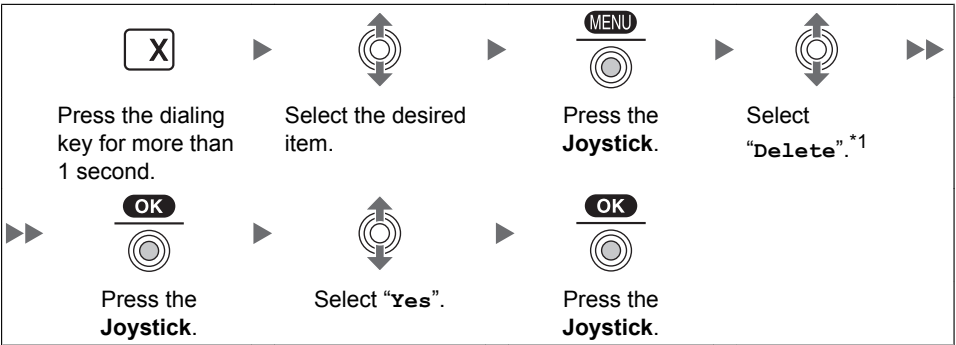


- *1 Select **"Delete All"** if you want to delete all items.

- If you delete a Phonebook item that you also assigned to a Hot Key, the Hot Key Dial is also deleted. (See page 47.)

Outgoing Call Log

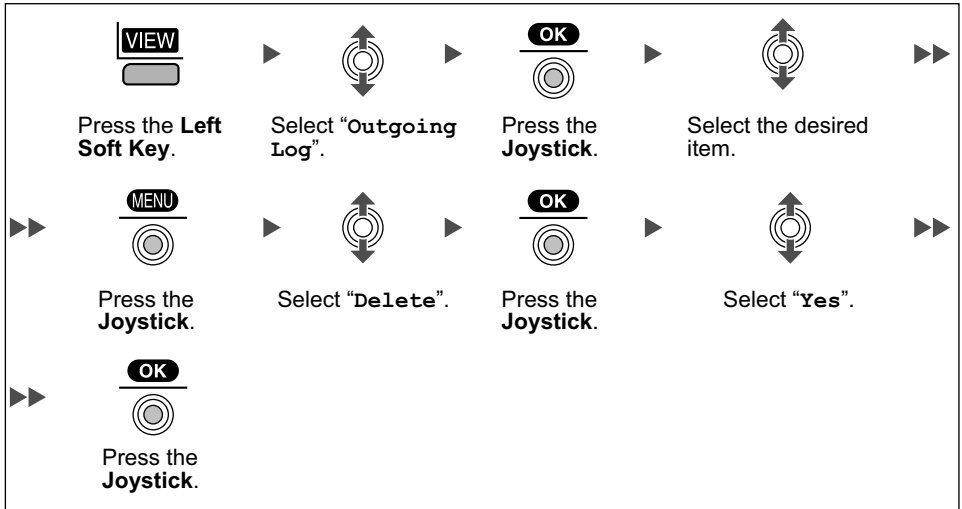


Incoming Call Log

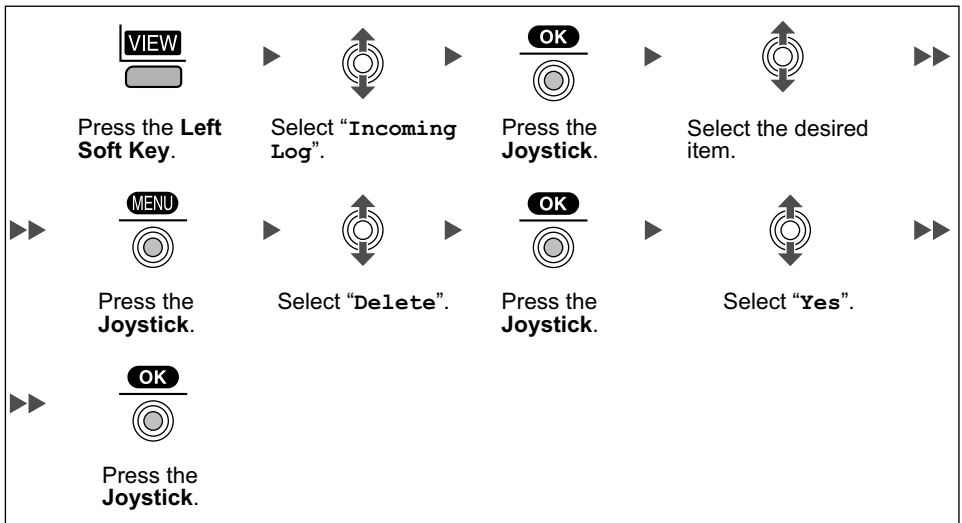


Changing the Initial Settings

You can customize the handset by editing the settings found under “**Setting Handset**” in the menu list, as follows:

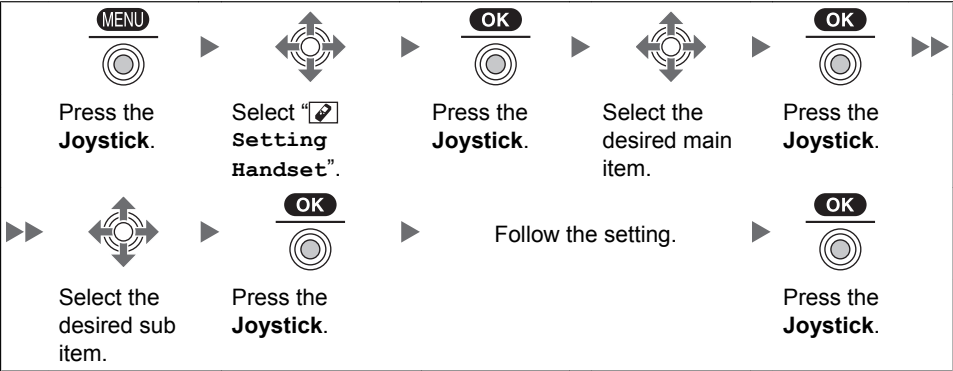

- To return to the previous menu, press **BACK**.
- To cancel, press **Cancel** at any time.
- The handset will beep to indicate that the new settings have been saved.

Handset Setting Menu Layout

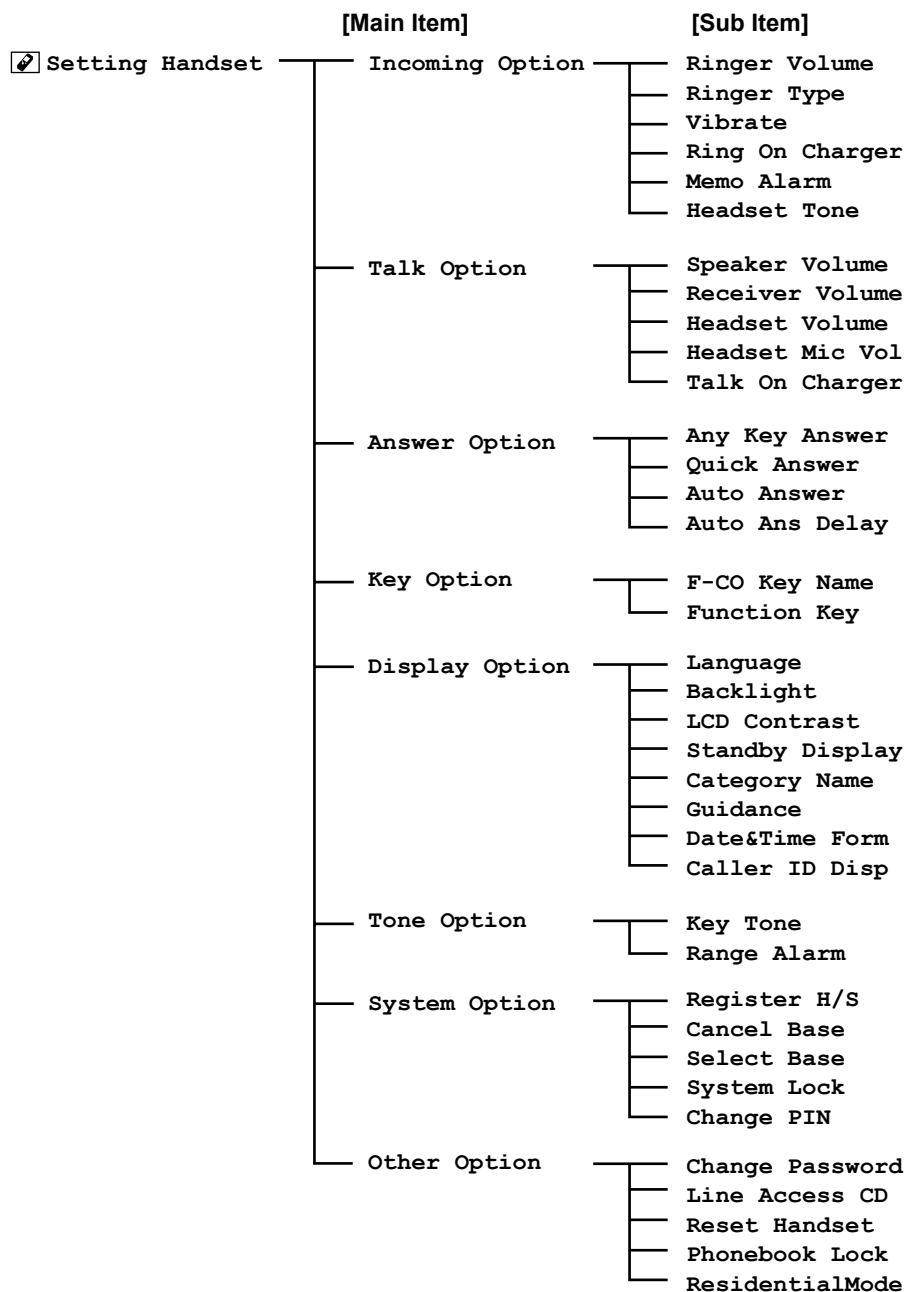

Configuring Handset Settings

Incoming Option

Sub Item	Description	Setting	Default
Ringer Volume	Adjusts the ringer volume.	<input type="checkbox"/> Step Up <input type="checkbox"/> Step Down <input type="checkbox"/> Level 1-6 <input type="checkbox"/> Off	Level 3
Ringer Type	Ringer Pattern Selects the ringer pattern for each type of call.	<input type="checkbox"/> Bell 1-6 <input type="checkbox"/> Melody 1-9	Bell 1
– Intercom Ring – CO Ring – Group Ring – Private Ring (Category 1-9)	LED Pattern Selects the LED pattern for each type of call.	<input type="checkbox"/> Red <input type="checkbox"/> Green <input type="checkbox"/> Orange <input type="checkbox"/> R→G→O	CO Ring: Red Intercom Ring/ Private Ring: Green Group Ring: Orange
	Vib. Pattern Selects the vibrate pattern for each type of call.	<input type="checkbox"/> Single <input type="checkbox"/> Double <input type="checkbox"/> Triple <input type="checkbox"/> Short Double <input type="checkbox"/> Short Triple <input type="checkbox"/> Short Term <input type="checkbox"/> Continuous	Single
Vibrate	Selects whether the handset vibrates while receiving a call.	<input type="checkbox"/> Vib.& Ring <input type="checkbox"/> Vib.→ Ring <input type="checkbox"/> Off	Off
Ring On Charger	Selects the ringing mode (On or Off) while a handset is set on the charger.*1	<input type="checkbox"/> On <input type="checkbox"/> Off	On

Configuring Handset Settings

Sub Item	Description	Setting	Default
Memo Alarm	Ringer Pattern Selects the ringer pattern for each Memo Alarm.	<input type="checkbox"/> Bell 1-6 <input type="checkbox"/> Melody 1-9	Bell 1
	LED Pattern Selects the LED pattern for each Memo Alarm.	<input type="checkbox"/> Red <input type="checkbox"/> Green <input type="checkbox"/> Orange <input type="checkbox"/> R→G→O	Green
	Vib. Pattern Selects the vibrate pattern for each Memo Alarm.	<input type="checkbox"/> Single <input type="checkbox"/> Double <input type="checkbox"/> Triple <input type="checkbox"/> Short Double <input type="checkbox"/> Short Triple <input type="checkbox"/> Short Term <input type="checkbox"/> Continuous	Single
Headset Tone	Selects whether a tone is heard from the attached headset while receiving a call.	<input type="checkbox"/> On <input type="checkbox"/> Off	Off

*1 When "Ring On Charger" is set to on but "Ringer Volume" is set to off, the handset rings at level 1.

Talk Option

Sub Item	Description	Setting	Default
Speaker Volume	Adjusts the rear speaker volume.	Level 1-6	Level 3
Receiver Volume	Adjusts the receiver volume.	Level 1-4	Level 2
Headset Volume	Adjusts the headset speaker volume.	Level 1-4	Level 2
Headset Mic Vol	Adjusts the headset microphone volume.	Level 1-4	Level 1
Talk On Charger	Selects whether or not to continue the conversation when the handset is put on the charger during a conversation.	<input type="checkbox"/> On <input type="checkbox"/> Off	Off

Configuring Handset Settings

Answer Option

Sub Item	Description	Setting	Default
Any Key Answer	Answers a call by pressing any dialing key.	<input type="checkbox"/> On <input type="checkbox"/> Off	Off
Quick Answer	Answers a call while charging by just lifting up a handset from the charger.	<input type="checkbox"/> On <input type="checkbox"/> Off	Off
Auto Answer	Selects the types of calls that can be answered by AUTO ANSWER.	<input type="checkbox"/> Int Only <input type="checkbox"/> Int & CO	Int Only
Auto Ans Delay	Selects the number of seconds before a call is automatically answered when Auto Answer is turned on.	0 s-20 s	6 s

Key Option

Sub Item	Description	Setting	Default
F-CO Key Name	Edits the names of the flexible CO keys.	Max. 12 characters x 12 flexible CO keys x 4 bases	Not stored
Function Key	Edits Function Key list.	<input type="checkbox"/> Redial <input type="checkbox"/> Fwd/DND <input type="checkbox"/> Flash/Recall <input type="checkbox"/> Auto Answer <input type="checkbox"/> Conference <input type="checkbox"/> Pause <input type="checkbox"/> Auto Dial <input type="checkbox"/> PBX Program <input type="checkbox"/> None* ¹	1: Redial 2: Fwd/DND 3: Flash/Recall 4: Auto Answer 5: Conference 6: Pause 7: Auto Dial 8: None 9: None 0: PBX Program

*¹ Used to cancel the settings.

Display Option

Sub Item	Description	Setting	Default
Language	Selects the display language.	<input type="checkbox"/> Auto <input type="checkbox"/> English <input type="checkbox"/> Español <input type="checkbox"/> FRANÇAIS	Auto
Backlight	Turns on the backlight of the LCD and keypad.	<input type="checkbox"/> On <input type="checkbox"/> On & Receiving <input type="checkbox"/> Off	On
LCD Contrast	Adjusts the LCD contrast.	Level 1-5	Level 3
Standby Display	Selects what is shown on the display while in standby mode.*1	<input type="checkbox"/> H/S No. <input type="checkbox"/> Base & H/S No. <input type="checkbox"/> Edit	H/S No.
	Edits the name displayed on the LCD while in standby mode.	Max. 16 characters/4 digits	Not stored
Category Name	Edits the names of the categories.	Max. 15 characters x Category (1-9)	Not stored
Guidance *2	Selects whether the guidance display is shown or not in standby mode.	<input type="checkbox"/> On <input type="checkbox"/> Off	On
Date&Time Form	Selects the format for the date shown on the display in standby mode.	<input type="checkbox"/> DD-MM 12H <input type="checkbox"/> DD-MM 24H <input type="checkbox"/> MM-DD 12H <input type="checkbox"/> MM-DD 24H <input type="checkbox"/> DD-MM-YY <input type="checkbox"/> MM-DD-YY	MM-DD 12H
Caller ID Disp	Selects which caller information is displayed when a call is received. Either the information stored in the Handset Phonebook or the PBX can be displayed.	<input type="checkbox"/> H/S Phonebook <input type="checkbox"/> PBX Setting	PBX Setting

*1 If the extension name is stored in the PBX, the extension name is displayed when "H/S No." or "Base & H/S No." is selected. Depending on the number of characters stored for the extension name, the end of the extension name may not be displayed.

*2 This setting is applied only in Office mode. In Residential mode, you can set this item, but it will not be applied.

Configuring Handset Settings

Tone Option

Sub Item	Description	Setting	Default
Key Tone	Turns the key tone on or off.	<input type="checkbox"/> On <input type="checkbox"/> Off	On
Range Alarm	Selects whether the range alarm tone rings or not.	<input type="checkbox"/> On <input type="checkbox"/> Off	On

System Option

Sub Item	Description	Setting	Default
Register H/S	Registers a handset to a base.	Base 1-4	Not stored
Cancel Base ^{*1}	Cancels the registration of a handset.	Base 1-4 ^{*2}	
Select Base ^{*1}	Selects a base.	<input type="checkbox"/> Auto <input type="checkbox"/> Base 1-4	Auto
System Lock	Selects whether to lock the System Option set or not.	<input type="checkbox"/> On ^{*3} <input type="checkbox"/> Off	Off
Change PIN	Before registering your handset with a PBX, enter the PBX's PIN here. Once you have registered the handset with a PBX, this PIN can be changed so that the handset can be registered to an additional PBX.	Enter the PIN number. (max. 8 digits)	1234

*1 Only registered base is shown.

*2 You can select multiple bases simultaneously.

*3 Password is required. (4 digits)

Other Option

Sub Item	Description	Setting	Default
Change Password ^{*1 *2}	Changes the handset password (4 digits) used for unlocking the Handset Phonebook and using the "Reset Handset" option.	Enter Old Password. ↓ Enter New Password. ↓ Verify New Password.	1234
Line Access CD	Enters the line access code that matches the setting of your PBX. Three access line codes can be stored.	Select a number, then enter the code. (max. 6 digits)	No.1: 9 No.2: 8XX ^{*3} No.3: Not Stored
Reset Handset	Returns the handset settings to its default settings.	Enter Password. (4 digits) ↓ Select the desired item(s). ↓ Press "OK".	Not stored
Phonebook Lock	Locks/unlocks the Phonebook while the handset is in standby mode.	<input type="checkbox"/> On <input type="checkbox"/> Off	Off
ResidentialMode	Selects the operating mode: • On: Residential mode • Off: Office mode	<input type="checkbox"/> On <input type="checkbox"/> Off	On

^{*1} To avoid unauthorized access to this product:

- Change the default password.
- Set a password that is random and cannot be easily guessed.
- Change the password regularly.


^{*2} Make a note of the password so that you will not forget it.

^{*3} XX is identical to the CO line group number, and 8XX represents any 3-digit code starting with "8".

Memo Alarm Setting

An alarm will sound at the set time. A memo can also be displayed. Memo Alarm is available only when handset is within range of a CS.

To set

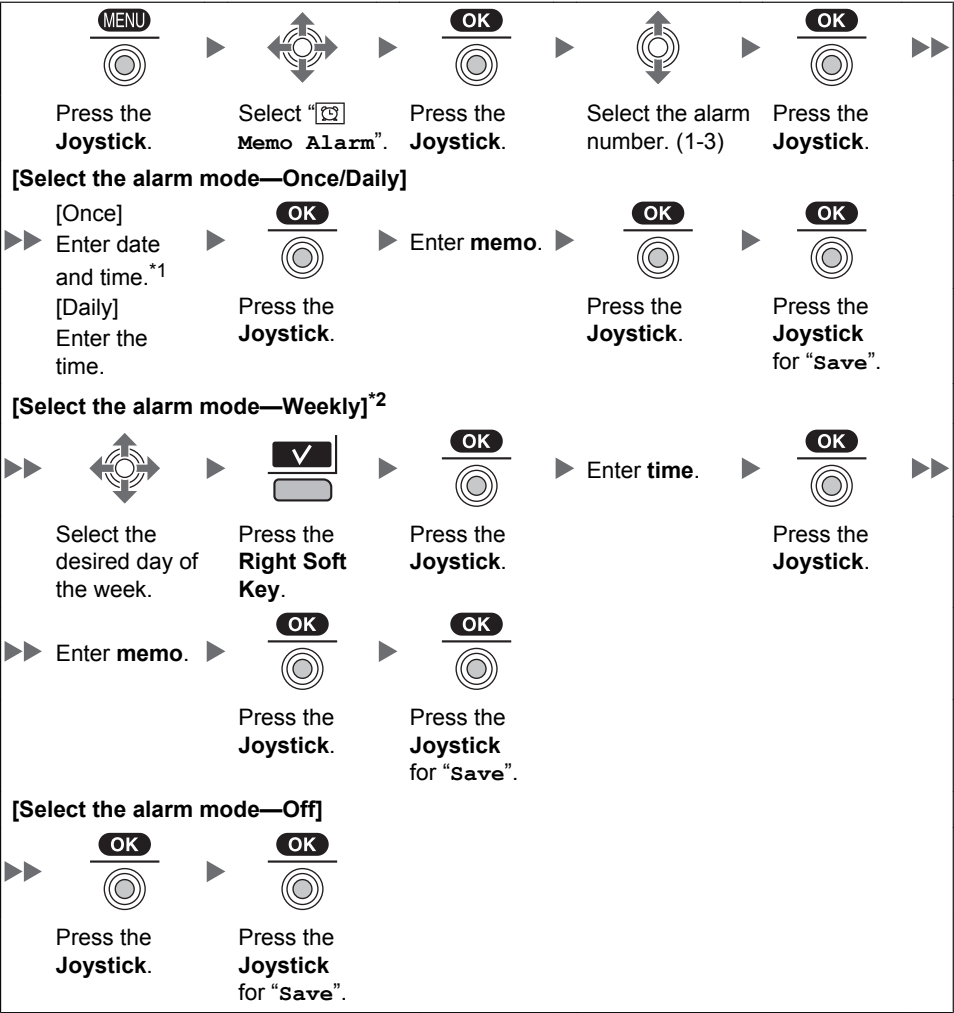


*1 You can select the format for the date and time. (See page 59.)

*2 A “√” will be displayed next to a day of the week that have been set.

- You can select the ringer/LED/vibrate pattern for each Memo Alarm. (See page 50.)
- If you are on a call at the time that the alarm is set to sound, it will sound after you have ended the call.

To delete the alarm mode setting

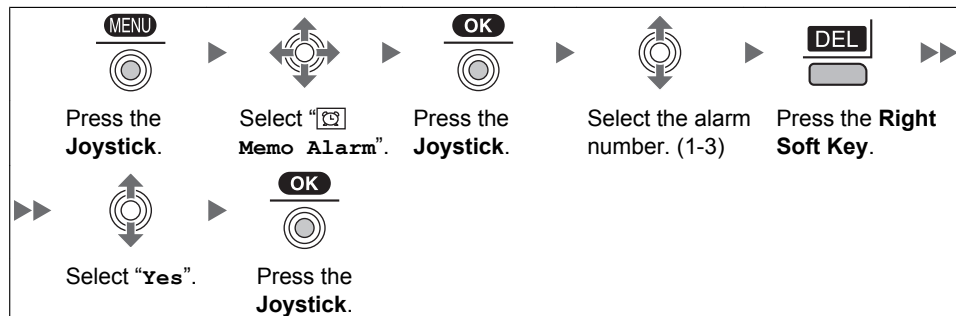


To stop the alarm

- Press any key other than soft keys.

Troubleshooting

Problem	Possible Cause	Solution
The handset does not work.	The battery is drained.	Charge the battery fully. (See “Charging the Battery” on page 6.)
	The power is OFF.	<ul style="list-style-type: none">• Turn it ON. (See “Location of Controls” on page 8.)• Re-insert the battery and try again. (See “Battery Installation” on page 5.)
The handset does not ring.	Ringer volume is set to “OFF”.	Adjust the ringer volume level. (See “Adjusting the Ringer Volume” on page 13.)
You cannot make/receive a call.	The handset is out of range, or the CS is busy.	Move closer to the CS or try again later.
	The radio channel is busy, or a radio communication error occurred.	Try again later.
You cannot dial.	The number that you dialed is restricted by the PBX.	Consult your dealer.
	Key lock mode is ON.	To cancel the mode, press the Joystick for about 2 seconds. (See “Key Lock” on page 9.)
	The radio channel is busy or a radio communication error occurred.	Try again later.
The handset stops working during operation.		<ul style="list-style-type: none">• Turn the handset off, then turn it back on. (See “Location of Controls” on page 8.)• Re-insert the battery and try again. (See “Battery Installation” on page 5.)
You cannot use the handset during a power failure.	The handset will not function during a power failure because the PBX stops emitting radiowaves.	

Problem	Possible Cause	Solution
The headset does not work.	A headset tone cannot be heard when receiving an incoming call when the headset is attached.	<ul style="list-style-type: none"> Make sure the headset tone setting is set to on. (See “Incoming Option” on page 56.) Make sure the headset jack is connected properly. (See “Location of Controls” on page 8.)
The tone from the headset cannot be changed to a bell or melody.	The headset tone is a specific tone and is not related to the Incoming Option settings (Ringer Type).	
Noise is frequently heard.		<ul style="list-style-type: none"> Set the handset and CS away from other electrical appliances. Move closer to the CS.
Two short beeps are heard during a conversation.	The radio signal is weak.	Move closer to the CS.
The charge indicator flashes red rapidly.	The charger is not connected properly.	<ul style="list-style-type: none"> Make sure the battery is inserted properly. Set the handset in the charger properly.
You charged the battery for 5.5 hours, but the beep tones sound, and  (needs to be charged) flashes after a few telephone calls.	The battery charge contacts may be dirty.	Clean the battery charge contacts without damaging them and charge once more.
	It is time to change the battery.	Replace with a new one.
While operating the handset, the AC adaptor feels warm. While charging the battery, the handset feels warm.	These are normal conditions.	


Error Messages

Error Message	Possible Cause	Solution
Register Unit	The handset has been canceled or the handset has not been registered.	Consult your dealer.
No Service	The handset is out of range.	Move closer to the CS.
	The CS is turned off.	Make sure the power cord is connected.
PS Not Connected	The called handset is out of range or is not turned on.	Try again later.
CS Busy	The CS is busy.	Try again later.
Please Wait...	The handset is connecting to the CS or PBX.	Wait for a moment.
Charge Battery	The handset battery has little charge remaining.	Charge the battery fully. (See "Charging the Battery" on page 6.)
No Entries	When trying to view the Phonebook: No items have been stored. (See "Storing an Item in the Handset Phonebook" on page 41.) When trying to view the Incoming or Outgoing Call Log: No logs have been stored.	
Memory Full	The Phonebook is full and cannot store the new item.	Remove unnecessary data in the Phonebook and try again.
Incorrect Entry	The numbers you entered are invalid.	Recheck your entry (max. 5 digits) and try again.
Need Repair 1 (-2)		Consult your dealer.

Battery Information


After your Panasonic battery is fully charged (at 25 °C [77 °F]):

Operation	Operating Time
While in use (Talk)	Up to about 10 h
While not in use (Standby)	Up to about 168 h

- Operating time may be shorter than listed above depending on usage conditions and ambient temperature.
- The battery will drain slowly even while the handset is turned off.
- The handset can receive calls while charging.
- Battery consumption increases when the handset is used out of range. If “” flashes, power off the handset.


Low Battery Warning

The battery needs to be charged in the following situations:

- “” flashes, and the alarm sounds*¹.
- “**Charge Battery**” is displayed. In this situation, the handset cannot be operated.


*¹ If the low battery warning occurs during a conversation, the call will be automatically disconnected one minute after the alarm sounds.

Replacing the Battery

If “” flashes after using the phone for a short time, even when the battery has been fully charged, the battery should be replaced.

Before replacing the battery, make sure the low battery warning is displayed, then turn off the power to prevent memory loss. Replace the battery and charge the new battery for at least 5.5 hours.

If you replace the battery before the low battery warnings appears, the battery strength icon may display an incorrect reading. In this case, use the handset as normal with the new battery installed. When the low battery warning is displayed, charge the battery for at least 5.5 hours. The battery strength icon will then display the correct reading.



1. Turn the power off to prevent memory loss.
2. Release the battery cover latch and lift the cover open.
3. Replace the old battery with a new one, and close the cover. Refer to “Battery Installation” on page 5.

- Please use a Panasonic battery with the service part number N4HHGMB00005 or HHR-P103.



This product is powered by a recyclable nickel-metal hydride battery. Please call 1-800-8-BATTERY for information on how to recycle this battery. There is a danger of explosion if the battery is incorrectly replaced.

Important Safety Instructions

When using your telephone equipment, basic safety precautions, including those below, should always be followed to reduce the risk of fire, electric shock and injury to persons.

- Do not use the charger near water, for example, near a bathtub, wash bowl, kitchen sink, or laundry tub, in a wet basement, or near a swimming pool.
- Avoid using a wired telephone during an electrical storm. There is a remote risk of electric shock from lightning.
- Do not use the telephone in the vicinity of a gas leak to report the leak.

SAVE THESE INSTRUCTIONS

For Your Safety

WARNING

- Do not install the product in any other way than described in relevant manuals.
- For safety reasons, do not physically modify the product or any optional equipment.
- The product may only be installed and serviced by qualified service personnel.
- To prevent possible fire or electric shock, do not expose this product to rain or moisture.
- Follow all warnings and instructions marked on this product.
- Do not place the product on an unstable surface, as a fall may cause serious internal damage.
- The charger should only be connected to the type of electric power supply specified on the charger label. If you are not sure of the type of power supply to your home, consult your dealer or local power company.
- Do not allow anything to rest on the power cord. Do not locate the charger where the power cord may be stepped on or tripped on.
- To reduce the risk of electric shock, do not disassemble this product. Only qualified personnel should service this product. Opening or removing covers may expose you to dangerous voltages or other risks. Incorrect reassembly can cause electric shock.
- Unplug the charger from the AC outlet and have the product serviced by qualified service personnel in the following cases:
 - A. When the power supply cord or plug is damaged or frayed.
 - B. If liquid has been spilled into this product.
 - C. If the product has been exposed to rain or water.
 - D. If the product does not operate according to this manual. Adjust only the controls that are explained in this manual. Improper adjustment of other controls may result in damage and may require service by a qualified technician to restore the product to normal operation.
 - E. If the product has been dropped or damaged.
 - F. If product performance deteriorates.
- Do not insert objects of any kind into this product through openings, as they may touch dangerous voltage points or short out parts that could result in a risk of fire or electric shock.

- The use of excessive sound volume through earphones, headphones, or headsets may cause hearing loss.
- Switch off the device when in the proximity of areas with potentially explosive atmospheres such as fuel/chemical storage facilities or blasting operations.
- Consult the manufacturer of any personal medical devices, such as pacemakers, to determine if they are adequately shielded from external RF (radio frequency) energy. (The product operates in the frequency range of 1,920 MHz to 1,930 MHz and the output peak power level is less than 0.12 W.)
- Do not use the product in health care facilities if any regulations posted in the area instruct you not to do so. Hospitals or health care facilities may be using devices sensitive to external RF (radio frequency) energy.
- Unplug the charger from AC outlet if it emits smoke, an abnormal smell or makes unusual noise. These conditions can cause fire or electric shock. Confirm that smoke has stopped and contact an authorized service center.

CAUTION

- Unplug the charger from the AC outlet before cleaning. Wipe the product with a soft cloth. Do not clean with abrasive powders or with chemical agents such as benzene or thinner. Do not use liquid cleaners or aerosol cleaners.
- When you operate this product, the AC outlet should be near the product and easily accessible.
- The product should never be placed near or over a radiator or other heat source.
- Use only the AC adaptor, battery and charger indicated in this manual.
- Do not dispose of the battery in a fire. They may explode. Check with local authorities for special disposal instructions.
- Do not open or disassemble the battery. Released electrolyte is corrosive and may cause burns or injury to the eyes or skin. The electrolyte is toxic if swallowed.
- Exercise care in handling batteries in order not to short the battery to conductive materials such as rings, bracelets, and keys. The battery and/or conductor may overheat and cause burns.
- Charge the battery provided with, or identified for use with, this product only in accordance with the instructions and limitations specified in this manual.
- There is a danger of explosion if the battery is incorrectly replaced.

Note

This telephone communicates using digital signals that are difficult to intercept. However, it is possible that the signals could be intercepted by a third party.

For Best Performance

Operating Range

- The range of operation depends on the topography of your office, weather, or usage conditions, because signals are transmitted between the CS and the handset by radio waves.
- Normally, you get greater range outdoors than indoors. If there are obstacles such as walls, noise may interfere with your telephone calls. In particular, high metal shelves or reinforced concrete walls will restrict your operating range.
- A handset may not work when it is too far from the CS depending on the structure of the building.
- We strongly suggest you hold the bottom half of the handset to ensure better call quality. Because, the antenna is located in the upper half of the handset.

Noise

Occasional noise or interference may occur due to electromagnetic radiation from objects such as refrigerators, microwave ovens, faxes, TVs, radios, or personal computers. If noise disturbs your telephone calls, keep the handset away from these electrical appliances.

Environment

- Do not place the product in rooms where the temperature is less than 5 °C (41 °F) or greater than 40 °C (104 °F).
- Allow 10 cm (3-15/16 in) clearance around the product for proper ventilation.
- Avoid environments with excessive smoke, dust, moisture, mechanical vibration, shock, or direct sunlight.

Routine Care

- Wipe the product with a soft cloth.
- Do not clean the product with abrasive powder or with chemical agents such as benzene or thinner.
- Clean the terminal of the charger periodically.
- When you leave the product unused for a long period of time, unplug the AC adaptor from the outlet.

Notice for product disposal, transfer, or return

- This product can store your private/confidential information. To protect your privacy/confidentiality, we recommend that you erase the information such as Phonebook or call log from the memory before you dispose, transfer or return the product.

Splash resistance (handset only)

The handset is designed to be splash-resistant, and meets IP54 classification for water protection. You can use the handset with wet hands.

- Do not immerse in water or leave under running water.
- Keep the handset away from salt water and corrosive liquids.
- When the optional headset is connected, the handset is not splash-resistant. Since water in headset jack may cause damage, close the headset jack cover when the optional headset is not in use. When the optional headset is connected, do not use the handset with wet hands.

- If the handset is wet, wipe with a soft dry cloth.
- The charger is not designed to be splash-resistant. Do not place the handset on the charger if the handset is wet.

Drop resistance (handset only)

The handset is designed to be drop-resistant, however, it should not be thrown or stepped on.

Dust resistance (handset only)

The handset is designed to be dust-resistant, and meets IP54 classification for dust protection.

FCC and Other Information

Privacy of communications may not be ensured when using this phone.

Radio Frequency Exposure Requirements

This product complies with FCC radiation exposure limits set forth for an uncontrolled environment. To comply with FCC RF exposure requirements, it must be installed and operated in accordance with provided instructions. For handset body-worn operation, this handset must be used with the provided plastic belt clip, which assures no metal parts and minimum of 1.5 cm (9/16 in) spacing from the user's body. This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

Note

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

WHEN PROGRAMMING EMERGENCY NUMBERS AND/OR MAKING TEST CALLS TO EMERGENCY NUMBERS:

1. Remain on the line and briefly explain to the dispatcher the reason for the call before hanging up.
2. Perform such activities during off-peak hours, such as early morning or late evening.

CAUTION

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this product.

Customer Information

This equipment complies with Part 68 of the FCC rules and the requirements adopted by the ACTA. On the inside of the battery compartment of this equipment is a label that contains, among other information, the following product identifier:

US: ACJKXNANKX-TD7696

If requested, this number must be provided to the telephone company.

If trouble is experienced with this equipment KX-TD7696, for repair or warranty information, please contact:

Panasonic Service and Technology Company-BTS Center
415 Horizon Drive Bldg. 300 Ste. 350-B
Suwanee, GA 30024-3186

If the equipment is causing harm to the telephone network, the telephone company may request that you disconnect the equipment until the problem is resolved.

Hearing Aid Compatibility

This telephone provides magnetic coupling for hearing aids as defined by the FCC in 47 CFR Section 68.316. Use only handsets or other acoustic devices with this equipment that are compliant with the hearing aid compatibility requirements of FCC Part 68.

When you hold the phone to your ear, noise might be heard in your Hearing Aid. Some Hearing Aids are not adequately shielded from external RF (radio frequency) energy. If noise occurs, use an optional headset accessory or the speakerphone option (if applicable) when using this phone. Consult your audiologist or Hearing Aid manufacturer about the availability of Hearing Aids which provide adequate shielding to RF energy commonly emitted by digital devices.

Compliance with TIA-1083 standard:



Telephone handsets identified with this logo have reduced noise and interference when used with T-Coil equipped hearing aids and cochlear implants.

Important Information

For Product Service

- Panasonic Service Centers are listed in the service center directory.
- Call 1-800-211-PANA (7262) for the location of your nearest authorized service center.
- Panasonic's e-mail address for customer inquiries:
consumerproducts@panasonic.com
for customers in the USA and Puerto Rico ONLY

To return a product for repair

Carefully pack and send it prepaid, adequately insured and preferably in the original carton. Attach a postage-paid letter, detailing the symptom, to the outside of the carton. **DO NOT** send the product to the Executive or Regional Sales offices, as they are not equipped to make repairs.

Product Service

Panasonic Factory Service Centers for this product are listed in the service center directory. Consult your certified Panasonic dealer for detailed instructions.

Keep a copy of all important data (such as your Phonebook) before sending the machine for repair.

- This cordless telephone is designed for use in the United States of America. Sale or use of this product in other countries may violate local laws.
- Ce téléphone sans fil est conçu pour être utilisé aux États-Unis d'Amérique. La vente ou l'emploi de cet appareil dans certains autres pays peut constituer une infraction à la législation locale.
- Este teléfono sin cordón fue elaborado para su uso en los Estados Unidos de América. La venta o el empleo de este producto en ciertos países puede constituir una violación de la legislación local.
- このコードレス電話機は、日本国外での使用を目的として設計されており、日本国内での使用は法律違反となります。従って、当社では日本国内においては原則として修理などのサービスは致しかねます。

System Requirements

This model supports the following CS models, PBX models, and PBX software versions:

CS	PBX	
	Model No.	Main Processing (MPR) Software Version
KX-T0155	KX-TDA50 KX-TAW848	PSMPR Software File Version 3.0000 or later
	KX-TDA100 KX-TDA200	PMPR Software File Version 3.0000 or later
	KX-TDA600	PLMPR Software File Version 3.1000 or later
	KX-TDE100 KX-TDE200	PMMPR Software File Version 1.0000 or later
	KX-TDE600	PGMPR Software File Version 2.0000 or later
	KX-NCP500 KX-NCP1000	PBMPR Software File Version 1.0000 or later
KX-T0158	KX-TDA600	PLMPR Software File Version 5.0000 or later
	KX-TDE100 KX-TDE200	PMMPR Software File Version 1.0000 or later
	KX-TDE600	PGMPR Software File Version 2.0000 or later
	KX-NCP500 KX-NCP1000	PBMPR Software File Version 1.0000 or later
KX-TDA0156	KX-TDA100 KX-TDA200	PMPR Software File Version 3.0000 or later
	KX-TDA600	PLMPR Software File Version 3.1000 or later
	KX-TDE100 KX-TDE200	PMMPR Software File Version 1.0000 or later
	KX-TDE600	PGMPR Software File Version 2.0000 or later

For your future reference

SERIAL NO. _____
(found inside the battery compartment)

DATE OF PURCHASE _____

NAME OF DEALER _____

DEALER'S ADDRESS _____

DEALER'S TEL. NO. _____

**Panasonic Consumer Electronics Company,
Division of Panasonic Corporation of North America**

One Panasonic Way, Secaucus, New Jersey 07094

<http://www.panasonic.com/csd>

Copyright:

This material is copyrighted by Panasonic Communications Co., Ltd., and may be reproduced for internal use only. All other reproduction, in whole or in part, is prohibited without the written consent of Panasonic Communications Co., Ltd.

© Panasonic Communications Co., Ltd. 2008

PSQX4912YA-UU KK1008RE1039